


RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	03/06/2025		

RoHS Compliant.

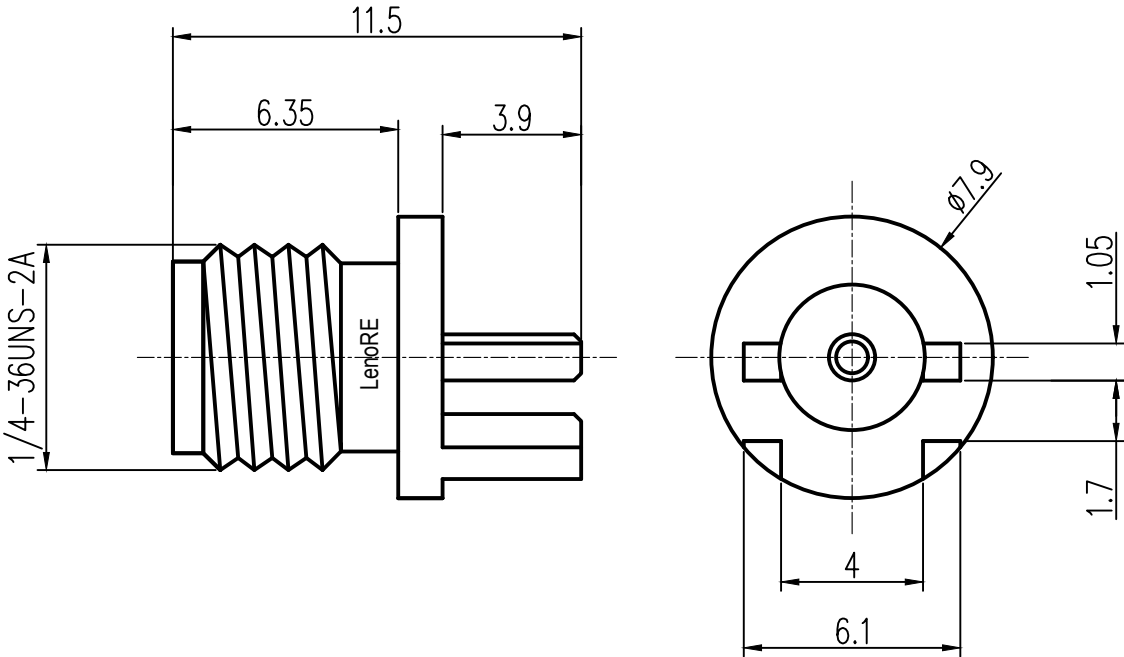

Interface Per: MIL-STD-348,

Material & Finishing:

- 1. Center condutor: Beryllium bronze, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Gold Plating

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~6GHz
- 3. VSWR: ≤1.1 @ 900MHz,
≤1.15 @ 1800MHz,
≤1.2 @ 3000MHz,
≤1.3 @ 6000MHz
- 4. Insertion loss: ≤0.05dB @ 900MHz,
≤0.05dB @ 1800MHz,
≤0.05dB @ 3000MHz,
≤0.1dB @ 6000MHz,
- 5. Proof Voltage : 500 Veff
- 6. Working voltage: 350 Veff

Package : 1 PC per bag

Laser Mark: LenoRF

Label Content:

LenoRF
Part No: 3.17.166
Part Name: SMA Jack End Launch for PCB Edge Mount, Installation Size 1.73 mm
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .X ±0.15 .XX ±0.1 .XXX ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01		
Drawn	DATA:		Projection		Cust P/N.	TBD
Checked	DATA:		Title: SMA Jack End Launch for PCB Edge Mount, Installation Size 1.73 mm			
Approved	DATA:					

