


RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	15/01/2025		

RoHS Compliant.

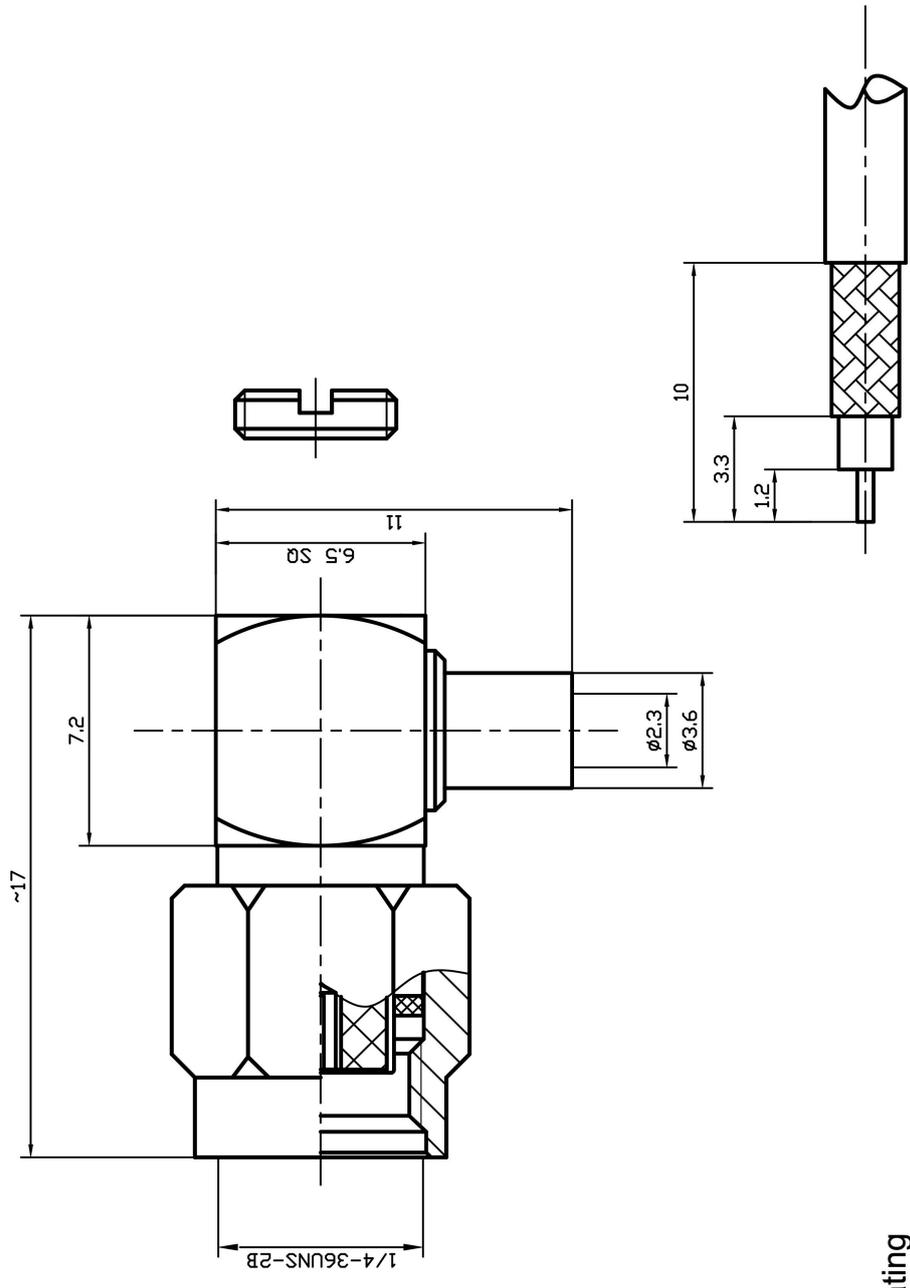

Suggested stripping

Interface Per: MIL-STD-348, IEC 60169-15
Cable Type: RG405

Material & Finishing:

- Center conductor: Phosphor bronze, Gold Plating
- Insulators: PTFE
- Body : Brass, Gold Plating

Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~6GHz
- VSWR: 1.25 Max,
- Dielectric Withstanding voltage:750V Min
- Voltage Rating : 350V Max

Unless otherwise specified, tolerances as below: .X ±0.15 .XX ±0.1 .XXX ±0.05 Angle: ±2°	Material:	See Notes	Weight	g
	Finish:	See Notes	Scale	8:1
	Unit	mm	Page	01
	REV.	V1.0	p/n	01
Drawn	DATA:	Projection	1st Angle	DWG NO. 3.01.428
Checked	DATA:	Title:		Cust P/N: TBD
Approved	DATA:	RP SMA RA PLUG FOR RG405 CABLE		

