

A		B		C	
RevNo	Revision note	Date		Signature	Checked
V1.0	Sketch only	18/03/2024			

RoHS Compliant.

Interface Per: MIL-STD-348, IEC 60169-16
Cable Type: RG402


Material & Finishing:

- 1. Center condutor: Brass, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Ternary alloy Plating

Electrical Data:


- 1. Impedance: 50 Ohms
- 2. Frequency: 0~6GHz
- 3. VSWR: ≤ 1.12 @ 900MHz,
 ≤ 1.15 @ 1800MHz,
 ≤ 1.2 @ 3000MHz,
 ≤ 1.35 @ 6000MHz
- 4. Insertion loss: $\leq 0.05\text{dB}$ @ 900MHz,
 $\leq 0.05\text{dB}$ @ 1800MHz,
 $\leq 0.05\text{dB}$ @ 3000MHz,
 $\leq 0.1\text{dB}$ @ 6000MHz
- 5. Dielectric Withstanding voltage: 1000V Min
- 6. Voltage Rating : 500V Max

Package : 1 PC per bag
Laser Mark: LenoRF

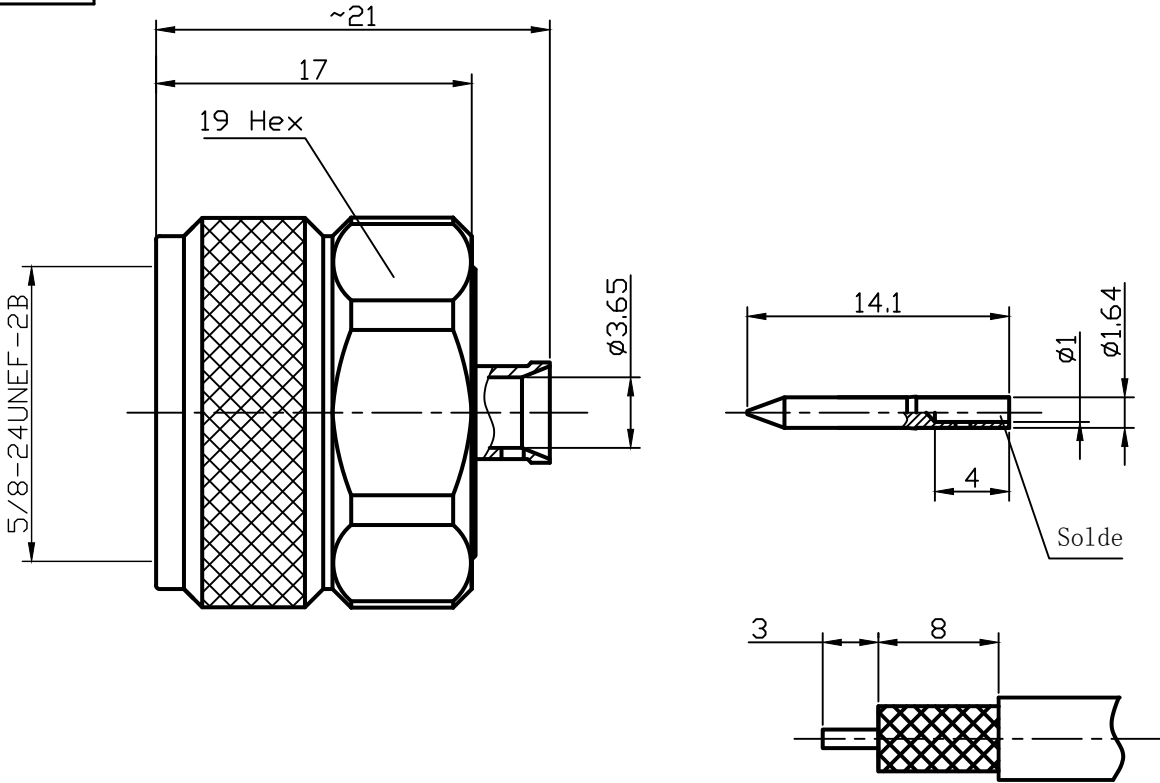

Label Content:

LenoRF
Part No: 3.04.259
Part Name: N PLUG SOLDER FOR RG402 CABLE
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	3 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.04.0259
	Drawn	DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: N PLUG SOLDER FOR RG402 CABLE			
Approved		DATA:				