



A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	25/04/2025									

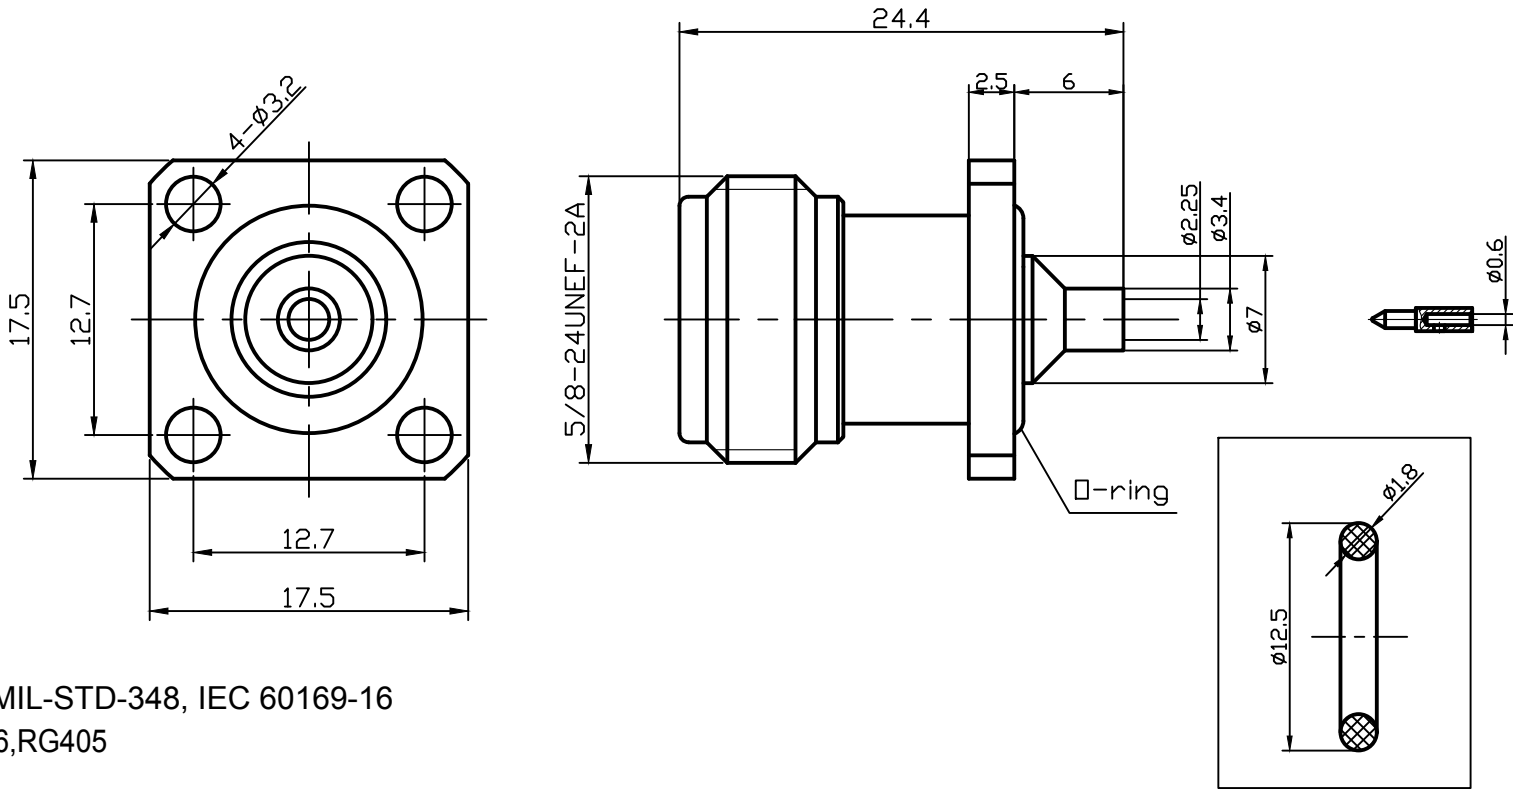

Interface Per: MIL-STD-348, IEC 60169-16
Cable Type: 086,RG405

- Material & Finishing:**
- Center condutor: Phosphor bronze, Gold Plating
 - Insulators: PTFE
 - Body : Brass, Ternary alloy Plating
 - Gasket: Silicone Rubber, Red

- Electrical Data:**
- Impedance: 50 Ohms
 - Frequency: 0~6GHz
 - VSWR: ≤1.25
 - Dielectric Withstanding voltage:1000V Min
 - Voltage Rating : 500V Max

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.04.0296
Drawn	DATA:		Projection		Cust P/N.	TBD
Checked	DATA:		Title: N JACK FOR 086 CABLE			
Approved	DATA:					