

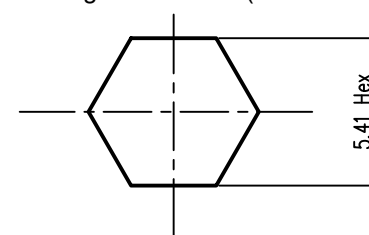
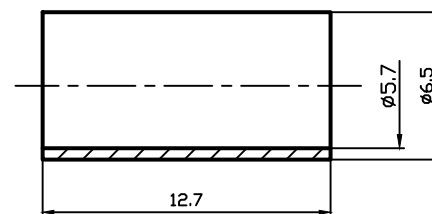
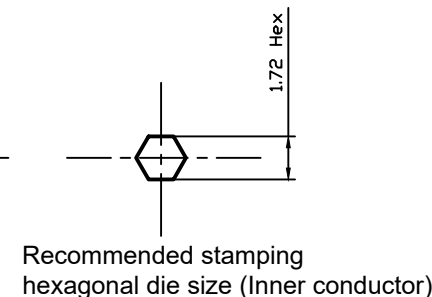
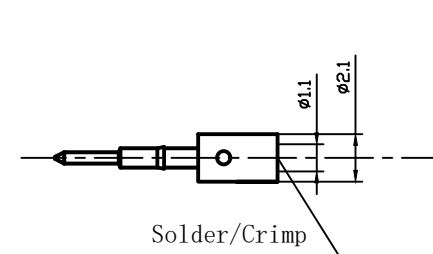


RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	06/09/2025		

RoHS Compliant.

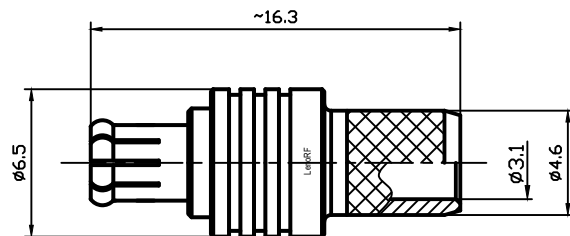

Recommended stamping hexagonal die size (cannula)

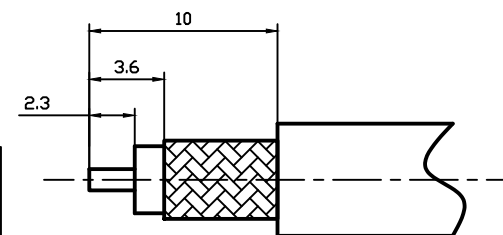

Suggested stripping

Interface Per: MIL-STD-348, IEC 60169-36
Cable Type: RG58

Material & Finishing:

1. Center Conductor: Phosphor bronze, Gold Plating
2. Contact: Phosphor bronze, Gold Plating
3. Insulators: PTFE
4. Body: Brass, Gold Plating
5. Crimping Ferrule: Soft Copper, Nickel Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: ≤ 1.15 @ 900MHz,
 ≤ 1.2 @ 1800MHz,
 ≤ 1.3 @ 3000MHz,
 ≤ 1.4 @ 6000MHz,
4. Insertion loss: ≤ 0.05 dB @ 900MHz,
 ≤ 0.05 dB @ 1800MHz,
 ≤ 0.05 dB @ 3000MHz,
 ≤ 0.1 dB @ 6000MHz,
4. Dielectric Withstanding voltage: 750v Min
5. Voltage Rating : 350v Max

Label Content:

LenoRF
Part No: 3.13.063
Part Name: MCX PLUG FOR RG58 CABLE
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified,
tolerances as below:

.x ± 0.15
.xx ± 0.1
.xxx ± 0.05
Angle: $\pm 2^\circ$

Material:	See Notes	Weight	g	 LenoRF	
Finish:	See Notes	Scale	8 : 1		
Unit	mm	Page	01		
REV.	V1.0	p/n	01	DWG NO.	3.13.063
	DATA:	Projection		Cust P/N.	TBD
	DATA:	Title: MCX PLUG FOR RG58 CABLE			
	DATA:				

Package : 1 PC per bag

Laser Mark: LenoRF