

A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	19/05/2022									

Interface Per: MIL-STD-348,

Material & Finishing:


- Center condutor: Phosphor bronze, Gold Plating
- Insulators: PTFE
- Body : Brass, Gold Plating

Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~6GHz
- VSWR: ≤1.1 @ 900MHz,
≤1.15 @ 1800MHz,
≤1.2 @ 3000MHz,
≤1.3 @ 6000MHz
- Insertion loss: ≤0.05dB @ 900MHz,
≤0.05dB @ 1800MHz,
≤0.05dB @ 3000MHz,
≤0.1dB @ 6000MHz,
- Proof Voltage : 500 Veff
- Working voltage: 350 Veff

Package : 1 PC per bag

Laser Mark: LenoRF

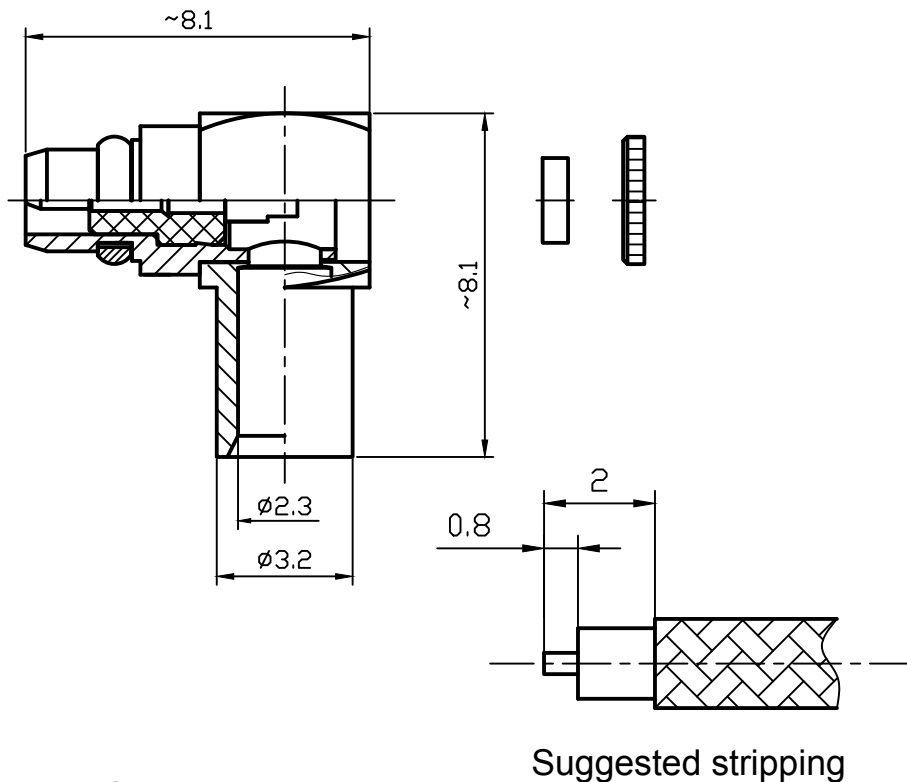

Label Content:

LenoRF
Part No: 3.14.022
Part Name: MMCX R/A PLUG FOR RG405 CABLE
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified,
tolerances as below:
.x ±0.15
.xx ±0.1
.xxx ±0.05
Angle: ±2°

Unless otherwise specified, tolerances are below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01		
					DWG NO.	3.14.022
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: MMCX R/A PLUG SOLDER FOR RG405 CABLE			
Approved		DATA:				