


A		B		C	
RevNo	Revision note	Date		Signature	Checked
V1.0	Sketch only	06/09/2025			

RoHS Compliant.

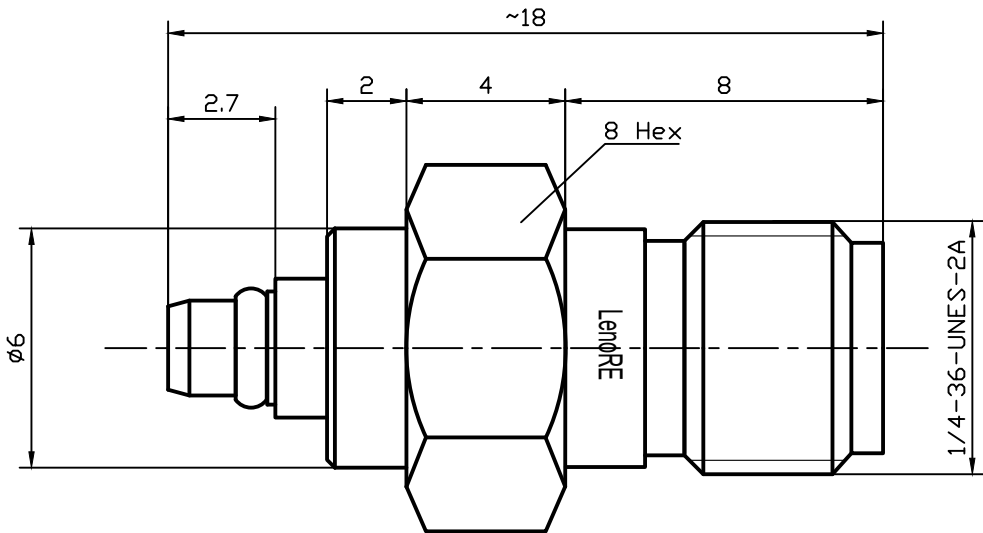

Interface Per: MIL-STD-348,

Material & Finishing:

1. Center conductor: Beryllium bronze, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Gold Plating

Electrical Data:


1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: ≤ 1.06 @ 900MHz,
 ≤ 1.1 @ 1800MHz,
 ≤ 1.15 @ 3000MHz,
 ≤ 1.25 @ 6000MHz
5. Insertion loss: ≤ 0.05 dB @ 900MHz,
 ≤ 0.05 dB @ 1800MHz,
 ≤ 0.05 dB @ 3000MHz,
 ≤ 0.1 dB @ 6000MHz,
7. Proof Voltage : 500 Veff
8. Working voltage: 350 Veff

Package : 1 PC per bag

Laser Mark: LenoRF

Label Content:

LenoRF
Part No: 3.17.163
Part Name: SMA JACK TO MMCX PLUG FLANGED MOUNTING ADAPTOR
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ± 0.15 .xx ± 0.1 .xxx ± 0.05 Angle: $\pm 2^\circ$	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.17.163
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: SMA JACK TO MMCX PLUG FLANGED MOUNTING ADAPTOR			
Approved		DATA:				