

A

B

C


D

E

F

RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	21/10/2025		

RoHS Compliant.

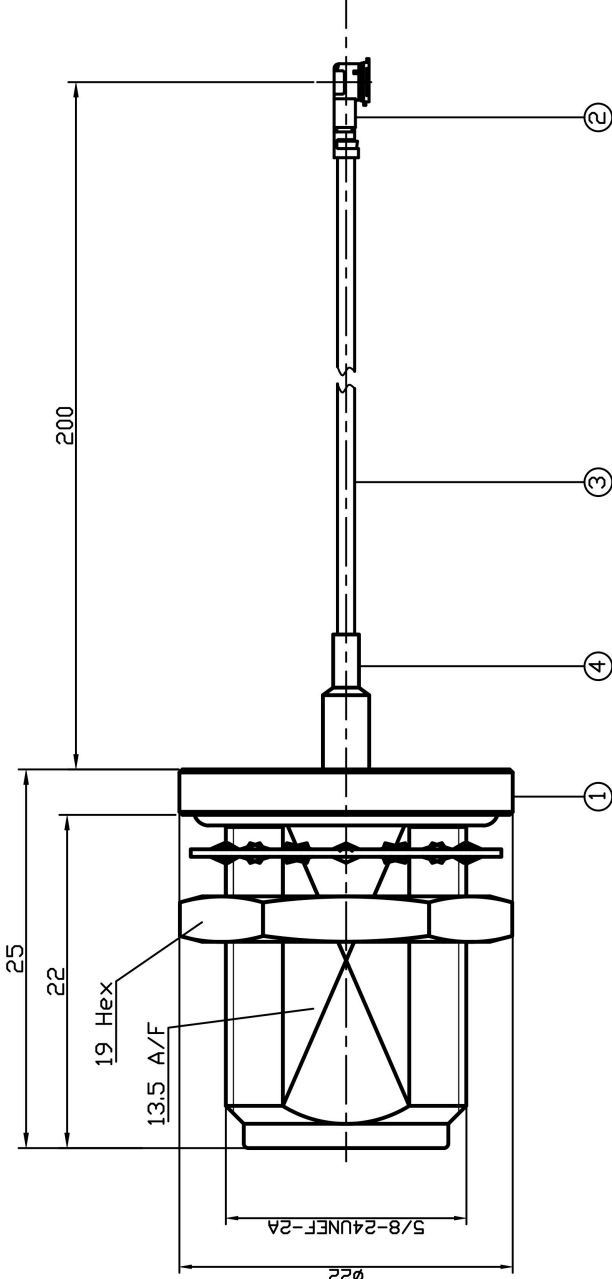

1. N jack connector
2. IPEX connector
3. 1.37 cable
4. Heat shrink tubing Black

Material & Finishing:

- N jack connector
1. Center condutor: Brass, Gold Plating
 2. Insulators: PTFE
 3. Body : Brass, Nickel Plating
 4. Crimping Ferrule: Soft Copper, Nickel Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: 1.4 Max
4. Dielectric Withstanding voltage:200v Min
5. Voltage Rating : 60v Max

Unless otherwise specified
tolerances as below:

.X ±0.15
.xx ±0.1
.xxx ±0.05
Angle: ±2°

Material:	See Notes	Weight	g
Finish:	See Notes	Scale	8 : 1
Unit	mm	Page	01
REV.	V1.0	p/n	01
DATA:		Projection	⊕
Drawn		Title:	TBD
Checked			
Approved			

N JACK TO IPEX FOR 1.37 CABLE 200mm



DWG NO. 3.19.197

Cust P/N. TBD

A

B

C

D

E

F