

产品规格书 Product Specifications

	产品名称 Part Name	客户编码 Customer P/N	版本 Version	发布日期 Issue Date
	RG8 KSR400 Coaxial Cable (41010400026)		V1.0	2022-06-17



版权所有 侵权必究

All rights reserved

	产品名称 Part Name	客户编码 Customer P/N	版本 Version	发布日期 Issue Date
	RG8 KSR400 Coaxial Cable (41010400026)		V1.0	2022-06-17


目录 Contents

1 产品结构和描述 Overall Structure and Description	1
2 电气性能 Electrical Characteristics	2
3 物理和机械性能 Mechanical and Physical Characteristics	3
4 防火要求 Fire Protection Requirements.....	3
5 应用环境 Application environment	3
6 禁用和限制物质 Banned and Restricted Substances	3
7 包装 Packages	3
8 参考文件 References	3
9 适用的产品编码和描述 Applicable P/N and description	3
10 修订履历 Revision History.....	3

	产品名称 Part Name	客户编码 Customer P/N	版本 Version	发布日期 Issue Date
	RG8 KSR400 Coaxial Cable (41010400026)		V1.0	2022-06-17

1 产品结构和描述 Overall Structure and Description

产品截面图 Section Drawing

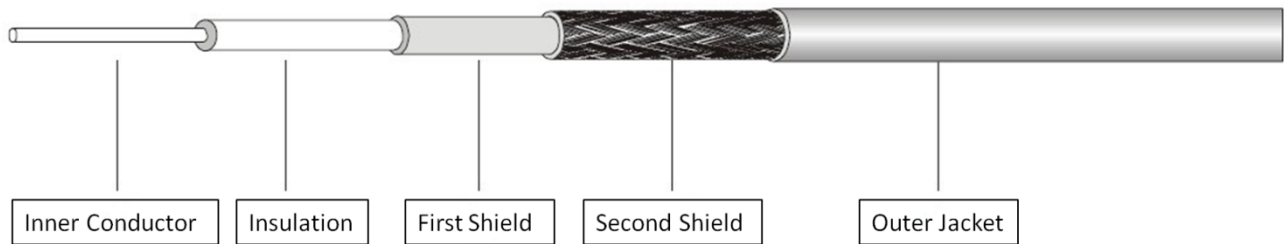

结构和描述 Structure and Description

序号 NO.	部件 Construction	材料 Material	尺寸 (毫米) Diameter (mm)
1	内导体	铜包铝	2.74±0.025mm
	Inner Conductor	Copper Clad Aluminum	
2	绝缘	物理发泡聚乙烯	7.24±0.13mm
	Insulation	Foam PE	
3	第一层屏蔽	自粘铝塑复合带	Nom.7.4mm
	1 st Shield	Bonded Aluminum	
4	第二层屏蔽	镀锡铜包铝合金	Diameter:Nom.8.13 mm
	2 st Shield	TCCAA Wire	Braid Coverage:≥85%
5	外护套	黑色聚乙烯	10.16±0.20mm
	Outer Jacket	Black PE	
6	印字	KINGSIGNAL KSR400 50 OHM COAXIAL CABLE MMDDYY-TTTT-N *****M	
	Marking		
7	备注	1. The surface markings words of the cable which should accord with the corresponding regulation of the standard GB6995.1 (eqv. IEC 60304) should be clear and natty, have no overprint and lack of printing. The marking words which color should not be transferred should be affixed with the cable jacket tightly. 2. The surface markings words should be so clear to identify when they are wiped 10 times gently by water-immersed absorbent cotton or cotton.	
	Remark		

	产品名称 Part Name	客户编码 Customer P/N	版本 Version	发布日期 Issue Date
	RG8 KSR400 Coaxial Cable (41010400026)		V1.0	2022-06-17

2 电气性能 Electrical Characteristics

序号 NO.	性能参数 Parameter	限值 Vaule
1	最大工作电压 (V DC)	2000
	Max. Operating Voltage (V DC)	
2	绝缘电阻 (MΩ.km at 20 ℃)	≥5000
	Insulation Resistivity (MΩ.km at 20 ℃)	
3	介质电压(1 minute, V DC)	2000 (No Crack)
	Dielectric Strength (1 minute, V DC)	
4	特性阻抗	50±2 Ω (DC~3000MHz)
	Characteristic Impedance	
5	互电容 (参考)	78pF/m
	Mutual Capacitance (reference)	
6	相对传输速率 (典型值)	85%
	Relative Propagation Velocity (Typical)	
7	峰值功率	Max. 500W
	Peak Power Rating	
8	回波损耗 (驻波比)	DC~3000MHz≤1.28
	Return Loss (VSWR)	
9	屏蔽衰减	≥90 dB
	Shield Effectiveness	
10	衰减/Attenuation	
	频率/Frequency	标称衰减值/Nominal Attenuation
	MHz	dB/100m
	140	6.00
	450	10.27
	900	14.78
	1500	19.40
	1800	21.48
	2000	22.64
	2400	25.92
	2500	26.80
	3000	28.64
	5800	41.8
	1. Nominal attenuation at 20℃ cable temperature (typical) ; 2. Maximum value + 5%	
11	认证	The completed cable shall comply with 2006/95/EC(LVD), 2011/65/EU(RoHS)
	Certification	

	产品名称 Part Name	客户编码 Customer P/N	版本 Version	发布日期 Issue Date
	RG8 KSR400 Coaxial Cable (41010400026)		V1.0	2022-06-17

3 物理和机械性能 Mechanical and Physical Characteristics

序号 NO.	性能参数 Parameter	限值 Vaule
1	护套抗拉强度	$\geq 13\text{MPa}$
	Jacket tensile	
2	护套伸长率	$\geq 500\%$
	Jacket elongation	
3	单次弯曲半径 (mm)	25.4
	Bending radius once/	
4	多次弯曲半径 (mm)	101.6
	Flexible application radius	

4 防火要求 Fire Protection Requirements

无 No requirement

5 应用环境 Application environment

序号 NO.	性能参数 Parameter	限值 Vaule
1	最低安装温度	$-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$
	Min. Installation Temperature	
2	储存温度	$-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
	Storage Temperature	
3	工作温度	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
	Operating Temperature	

6 禁用和限制物质 Banned and Restricted Substances

2011/65/EU (EU)&2015/863

Compliant

7 包装 Packages

According to Kingsignal packaging specifications.

8 参考文件 References

YD/T 1319

9 适用的产品编码和描述 Applicable P/N and description

RG8 KSR400 41010400026

10 修订履历 Revision History

版本 Version	修订内容 Description	制订 Prepared By	审核 Checked By	批准 Approved By
1.0	首版	HQP	/	Roy.Wang
	First version	2022/06/17	/	2022/06/17