SMA PLUG


for RG402 semi-rigid coaxial cable

RoHS COMPLIANT

DX-3-01-484

TECHNICAL DATASHEET | REV. 1.0

MECHANICAL REFERENCE

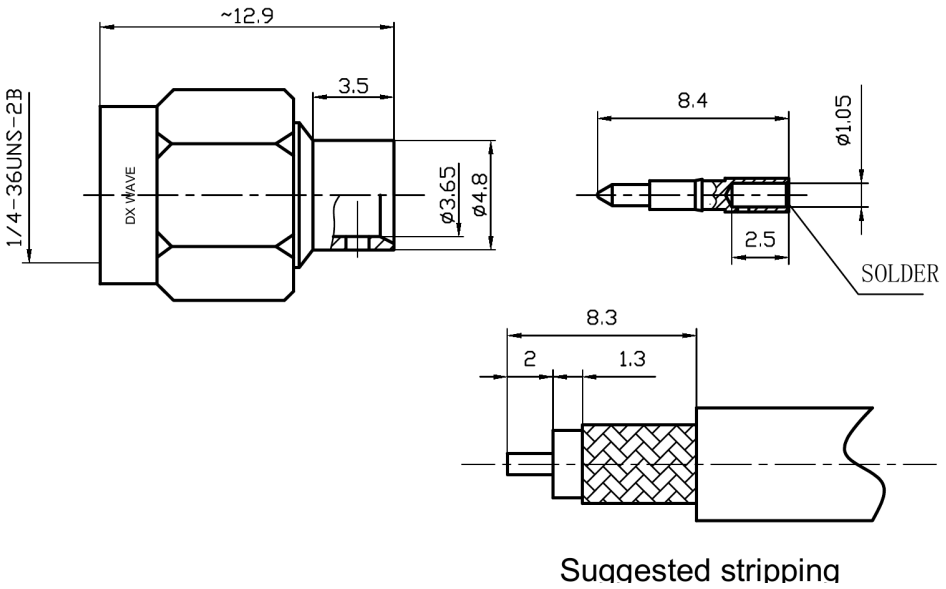

50 Ω	0-11 GHz	≤1.3	500 V max
IMPEDANCE	FREQUENCY	VSWR	VOLTAGE RATING

MECHANICAL & MATERIALS

INTERFACE	**MIL-STD-348 / IEC 60169-15**
CABLE TYPE	**RG402**
CENTER CONDUCTOR	**Brass, Gold Plating**
INSULATORS	**PTFE**
BODY	**Brass, Gold Plating**

ELECTRICAL & IDENTIFICATION

VSWR	**≤1.05 @ 900 MHz; ≤1.1 @ 1800 MHz; ≤1.2 @ 6000 MHz; ≤1.3 @ 11 GHz**
INSERTION LOSS	**≤0.05 dB @ 900/1800/3000 MHz; ≤0.1 dB @ 6 GHz**
PROOF / WITHSTAND VOLTAGE	**1000 V min**
VOLTAGE RATING	**500 V max**
PACKAGE	**1 pc per bag**
LASER MARK	**DX WAVE**
PART NUMBER	**DX-3-01-484**
LABEL DATE	**WW/YY (week/year)**