

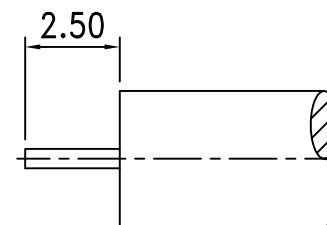


Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0 ~ 26.5 GHz
V.S.W.R.	≤ 1.3 Max.

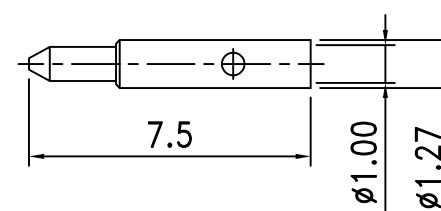

RECOMMENDED
CABLE STRIPPING DIM'S

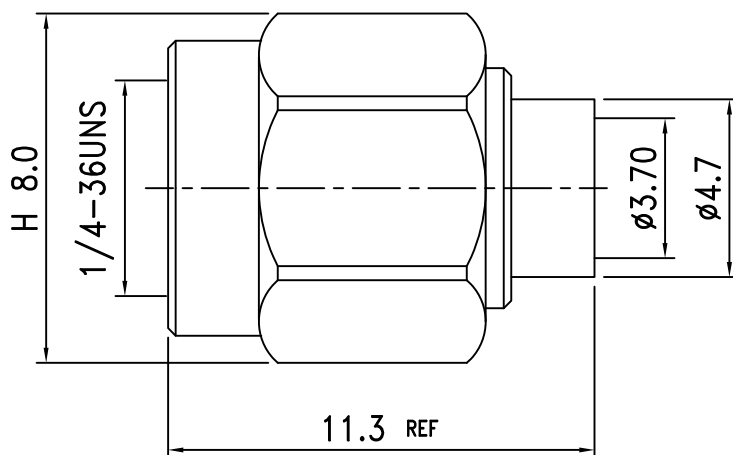

ROHS
COMPLIANT

6.	Shell	Brass	1	Gold
5.	Gasket	Silicone	1	Red
4.	Retaining ring	Stainless Steel	1	None
3.	Insulation	PTFE	1	White
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Gold
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS
Louis	比例 5:1	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	±0.2
主管APPROVAL	.XX	±0.1
	.XXX	±0.05
Peter	ANGLE	±0.5°

	夏尼有限公司 SHINING PRECISION CO., LTD	
	圖名 TITLE	HF SMA-02-141-TGG-27G For Cable Semi-rigid .141 (RG402)
版次REV.	電腦圖檔CAD FILE	日期DATE
A	C:/SHINING/HF SMA-PARTS/SMA-02-141-27G.DWG	2017.03.31