






Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0 ~ 6 GHz
V.S.W.R.	≤ 1.3 Max.

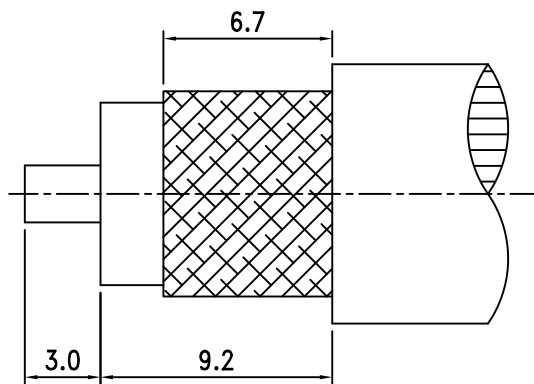

RECOMMENDED
CABLE STRIPPING DIM'S

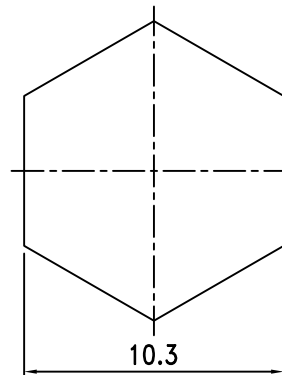

RECOMMENDED
CRIMPING TOOL SIZE

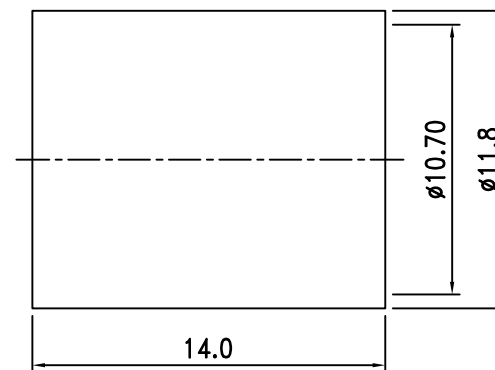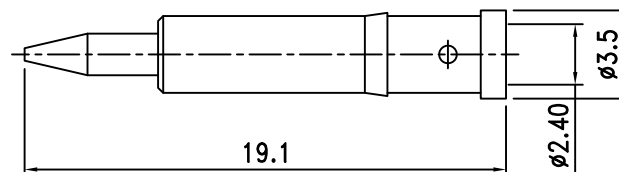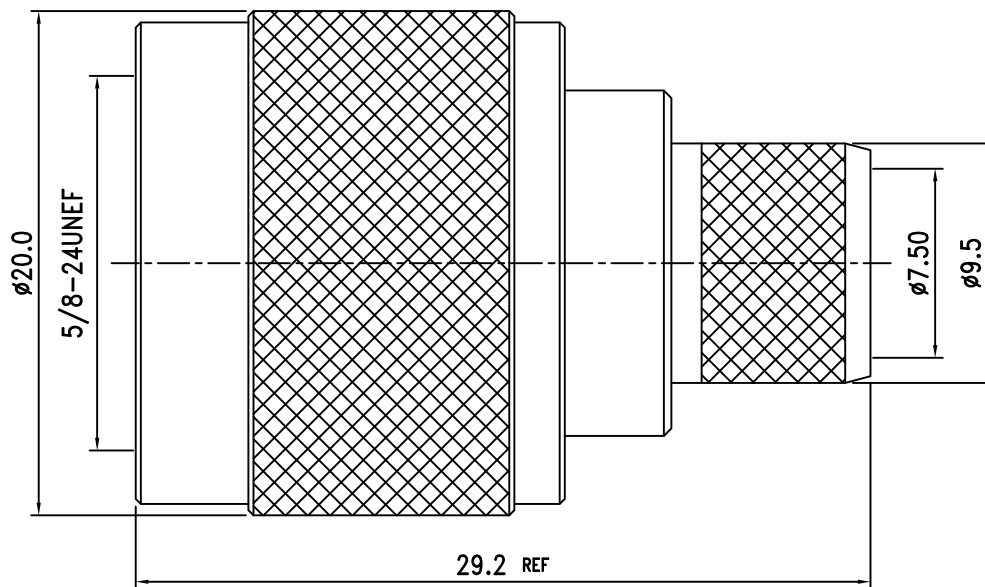

ROHS
COMPLIANT

8.	Ferrule	Brass	1	Nickel
7.	Shell	Brass	1	Nickel
6.	Gasket	Silicone	1	Red
5.	Retaining Ring	Brass	1	None
4.	Chassis	Brass	1	Nickel
3.	Insulator	PTFE	1	White
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS
Jenny	比例 10:3	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	±0.2
主管APPROVAL	.XX	±0.1
	.XXX	±0.05
Peter	ANGLE	±0.5°



夏尼有限公司
SHINING PRECISION CO., LTD

圖名
TITLE

N-04B-TGN For Cable RG8U / 213U

版次REV.

電腦圖檔CAD FILE

日期DATE

B-1

C:/SHINING/N-PARTS/N-04B.DWG

2017.02.18