






Electrical Characteristics	
Impedance	50 $\Omega$
Frequency Range	0 ~ 6 GHz
V.S.W.R.	$\leq$ 1.3 Max.

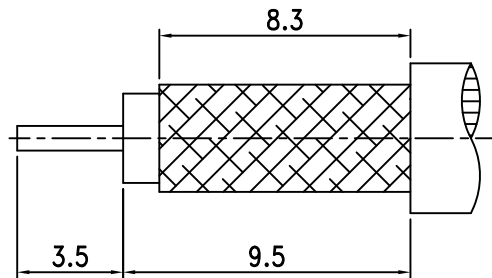

RECOMMENDED  
CABLE STRIPPING DIM'S



RECOMMENDED  
CRIMPING TOOL SIZE

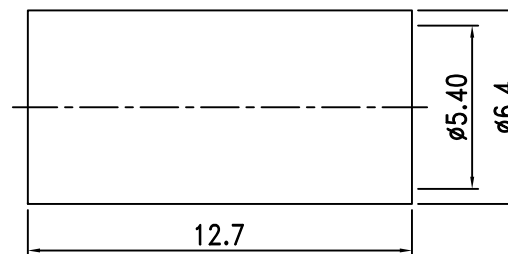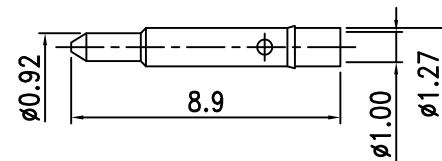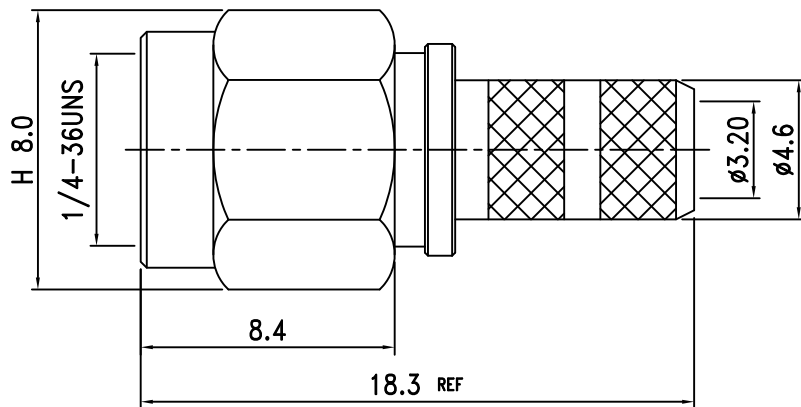

ROHS  
COMPLIANT

7.	Ferrule	Brass	1	Gold
6.	Shell	Brass	1	Gold
5.	Gasket	Si-Rubber	1	Red
4.	Retaining Ring	Brass	1	None
3.	Insulation	PTFE	1	White
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Gold
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS
Jenny	比例 4:1	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	$\pm 0.2$
主管APPROVAL	.XX	$\pm 0.1$
	.XXX	$\pm 0.05$
Peter	ANGLE	$\pm 0.5^\circ$

	夏尼有限公司 SHINING PRECISION CO., LTD	
圖名 TITLE	SMA-02F-TGG For Cable RG-58U	
版次REV.	電腦圖檔CAD FILE	日期DATE
A	C:/SHINING/SMA-FINISH/LUS/SMA-02F.DWG	2004.11.04