


Electrical Characteristics	
Cable or Adaptor	Adaptor
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 335 Vrms
Dielectric Withstanding Voltage	≤ 1000 Vrms



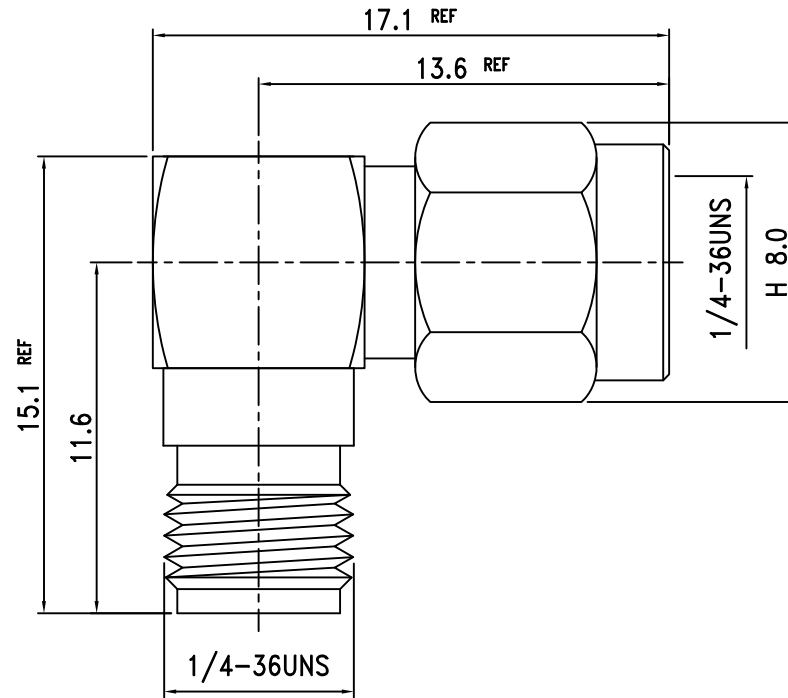

ROHS
 COMPLIANT

7.	Shell	Brass	1	Gold
6.	Gasket	Si-Rubber	1	Red
5.	Retaining Ring	SUS304	1	None
4.	Insulation	PTFE	2	White
3.	Pin	Phosphor Bronze	1	Gold
2.	Body	Brass	1	Gold
1.	Body	Brass	1	Gold
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS	夏尼有限公司 SHINING PRECISION CO., LTD	
Jack	比例 4:1	單位 mm		
審核CHECKED	公差TOLERANCE			
<i>Peter</i>	.X	±0.2	圖名 TITLE	SMA-19-S1-TGG
主管APPROVAL	.XX	±0.1	版次REV.	電腦圖檔CAD FILE
	.XXX	±0.05	B	日期DATE
<i>Peter</i>	ANGLE	±0.5°		