


Electrical Characteristics	
Cable or Adaptor	SMA Female to N Female Adaptor
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≦ 1.30
Working Voltage	≦ 480 Vrms
Dielectric Withstanding Voltage	≦ 1000 Vrms



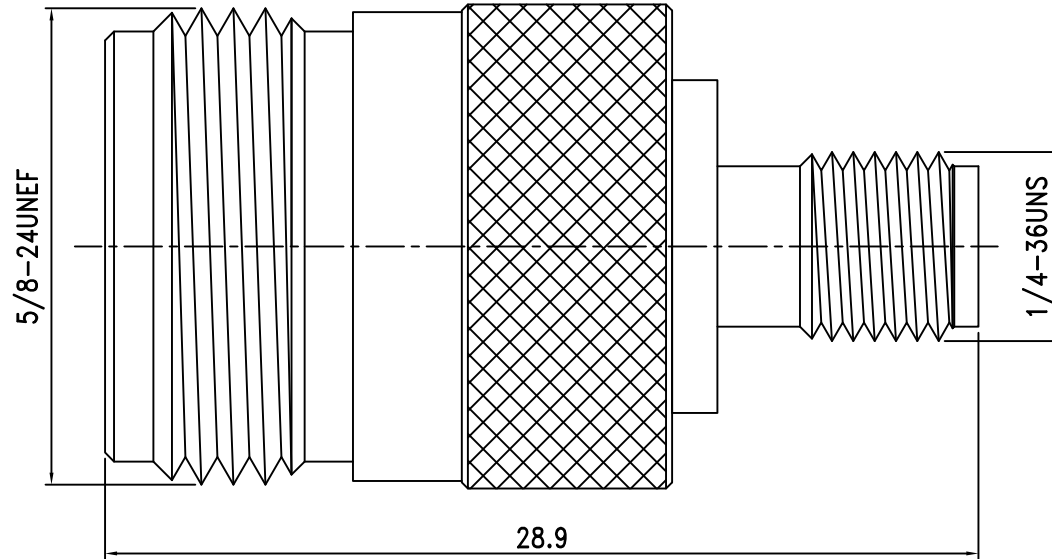

ROHS
 COMPLIANT

5.	Pin	Brass	1	Gold
4.	Insulation	PTFE	1	White
3.	Insulation	PTFE	1	White
2.	Body 2	Brass	1	Nickel
1.	Body 1	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS	 夏尼有限公司 SHINING PRECISION CO., LTD		
Kelly	比例 4:1	單位 mm			
審核CHECKED	公差TOLERANCE		圖名	SMA-21-TGN	
Peter	.X	±0.2	TITLE		
主管APPROVAL	.XX	±0.1	版次REV.	電腦圖檔CAD FILE	日期DATE
	.XXX	±0.05	C	C:/SHINING/ADAP-PARTS/SMA-21.DWG	2017.12.11
Peter	ANGLE	±0.5°			