


A		B		C		D	E	F
RevNo	Revision note	Date		Signature	Checked	RoHS Compliant.		
V1.0	Sketch only	30/05/2024						

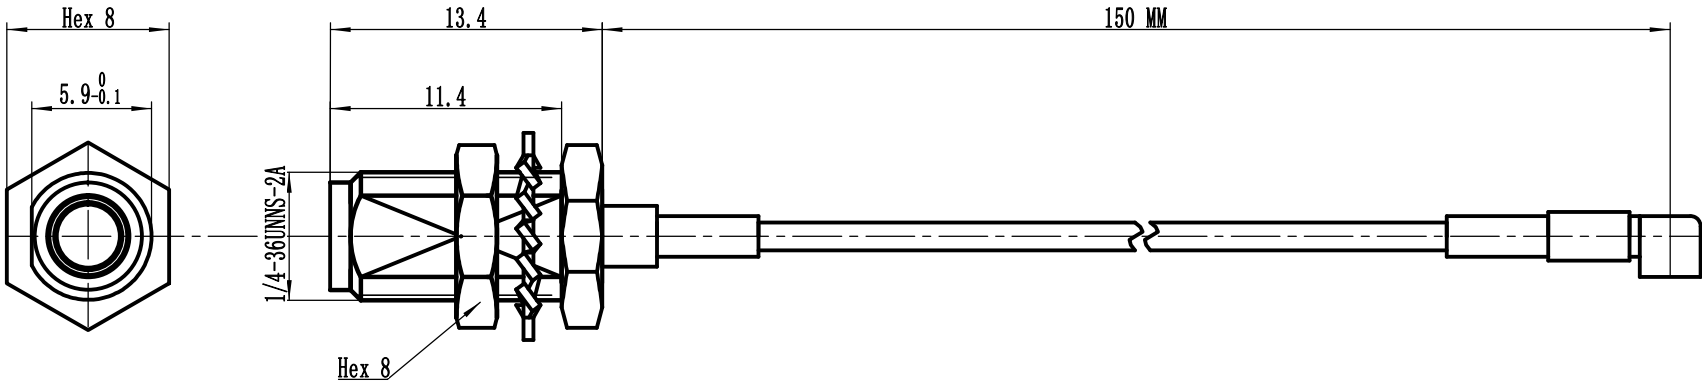


- 1.SMA jack connector
- 2.UFL connector
- 3.1.37 Cable
- 4.Heat shrink tube(black)

Material & Finishing:

- 1. Center condutor: Phosphor bronnze, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Gold Plating

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~6GHz
- 3. VSWR:1.3 Max
- 4. Dielectric Withstanding voltage:200V Min
- 5. Voltage Ratinng:60V Max

Unless otherwise specified, tolerances as below: .X ±0.15 .XX ±0.1 .XXX ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	3 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3. 02. 080. 1123
	Drawn	DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: SMA JACK TO UFL FOR 1.37 CABLE			
Approved		DATA:				