


Electrical Characteristics	
Cable or Adaptor	UHF Male to N Female Adaptor
Impedance	50 Ω
Frequency Range	DC - 1 GHz
V.S.W.R.	≦ 1.30
Working Voltage	≦ 750 Vrms
Dielectric Withstanding Voltage	≦ 1500 Vrms

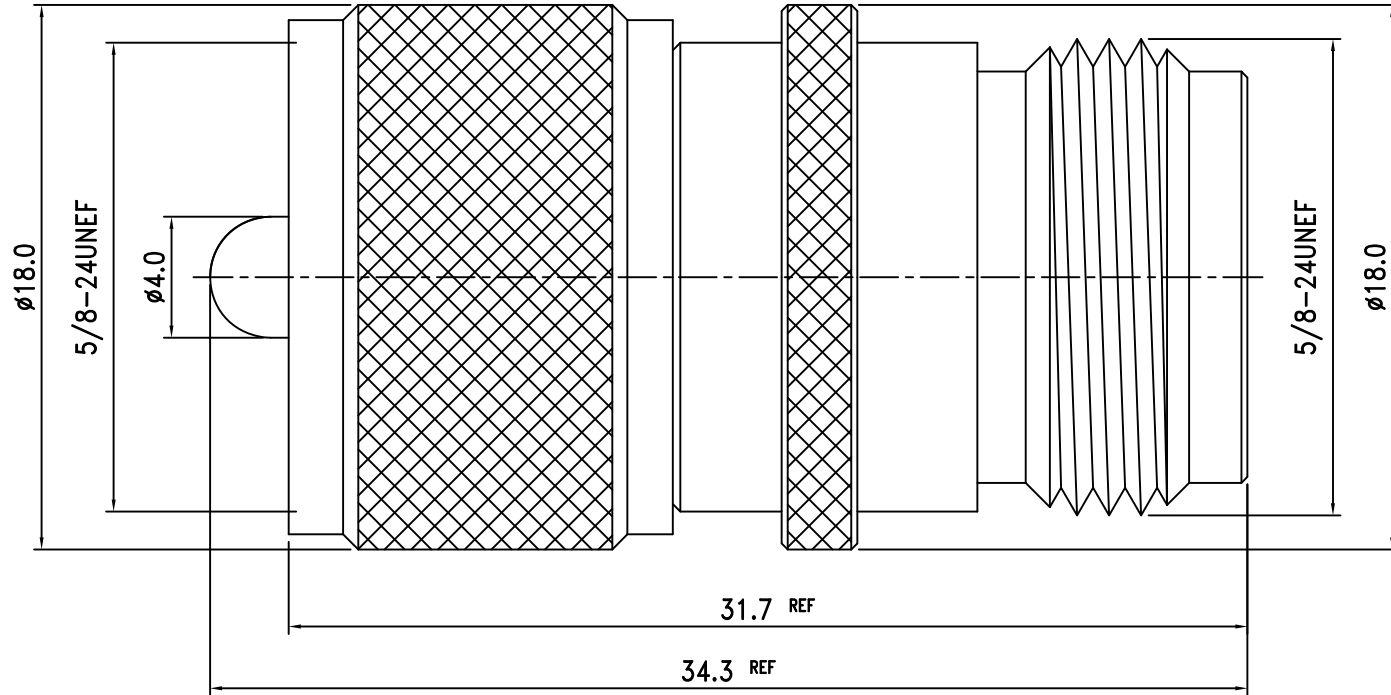

ROHS
COMPLIANT

NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH
6.	Shell	Brass	1	Nickel
5.	Retaining Ring	Brass	1	None
4.	Insulation	PTFE	1	White
3.	Insulation	PTFE	1	White
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel

繪圖DRAWN	SCALE	UNITS
Kelly	比例 4:1	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	±0.2
主管APPROVAL	.XX	±0.1
	.XXX	±0.05
Peter	ANGLE	±0.5°



夏尼有限公司
SHINING PRECISION CO., LTD

圖名 TITLE	UHF-16-3-TGN	
版次REV.	電腦圖檔CAD FILE	日期DATE
A	C:/SHINING/ADAP-PARTS/UHF-16-3.DWG	2017.12.08