

A6-0921 Lite

Omnidirectional Antenna
universal mounting

Technical Sheet



Applications


- CDMA 800
- GSM900 Systems
- GSM1800 Systems
- 3G (UMTS) 2100 System

Features

- Improved performance
- All weather operation
- Light weight, small size
- Universal mounting

Specifications

Model A6-0921			
Freq. Range-MHz		890-960	1710-2170
Beamwidth-°	E	60	50
	H	360	360
Gain-dBi		6	
VSWR		≤2	
Impedance-Ω		50	
Polarization		Vertical	
Maximum Power-W		50	
Connector		N Female	
Dimensions-mm		175 x 45 x 35	
Weight-kg		0.3	
Mounting		Wall mounting and Mast mounting (up to 45 mm)	

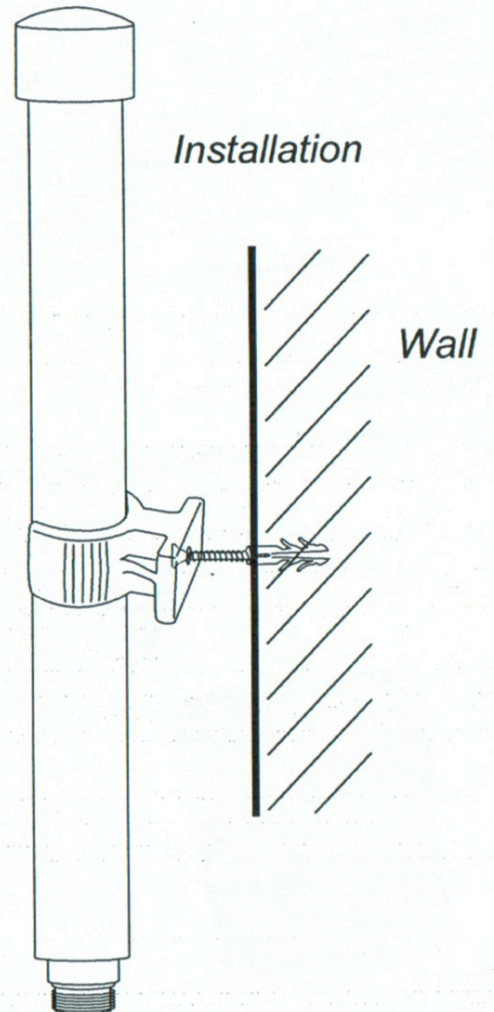

Supplied

Antenna (bracket for wall mounting)	1 pcs.
Fixing for wall mounting	1 pcs.