

A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	17/03/2025									

Interface Per: MIL-STD-348, IEC 60169-15
Cable Type: 670-141 SXE


Material & Finishing:

- Center condutor: Phosphor bronze, Gold Plating
- Insulators: PTFE
- Body : Brass, Gold Plating
- Other Metal Parts: Brass, Gold Plating
- Gasket: Silicone Rubber, Red

Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~3GHz
- VSWR: ≤1.1 @ 900MHz,
≤1.15 @ 1800MHz,
≤1.2 @ 3000MHz,
≤1.3 @ 6000MHz,
- Insertion loss: ≤0.05dB @ 900MHz,
≤0.05dB @ 1800MHz,
≤0.05dB @ 3000MHz,
≤0.1dB @ 6000MHz,
- Dielectric Withstanding voltage:1000V Min
- Voltage Rating : 500V Max

Package : 1 PC per bag
Laser Mark: LenoRF

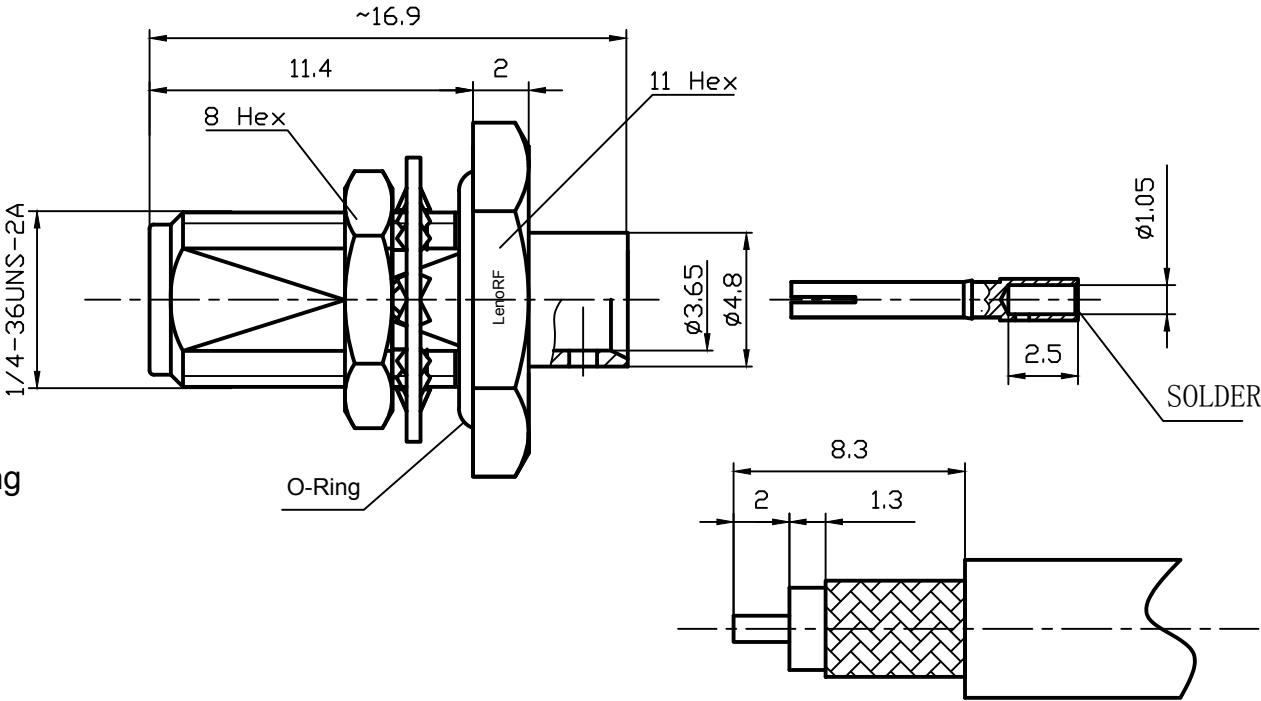

Suggested stripping

Label Content:

LenoRF
Part No: 3.01.370
Part Name: SMA JACK BULKHEAD FOR 141 CABLE
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .X ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.01.370
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: SMA JACK BULKHEAD FOR 141 CABLE			
Approved		DATA:				