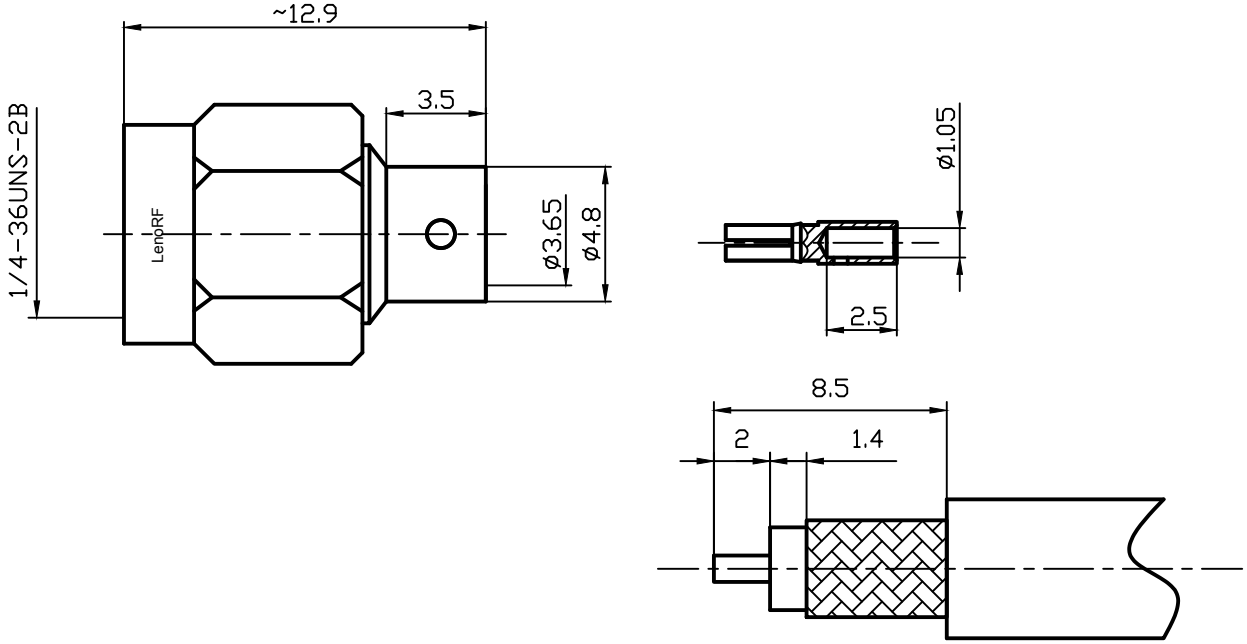



A		B		C		D		E		F		
RevNo	Revision note		Date	Signature	Checked	RoHS Compliant.						
V1.0	Sketch only		03/06/2025									
4 3 2 1 Interface Per: MIL-STD-348, IEC 60169-15 Cable Type: 670-141 SXE Material & Finishing: 1. Center conductor: Phosphor bronze, Gold Plating 2. Insulators: PTFE 3. Body : Brass, Gold Plating Electrical Data: 1. Impedance: 50 Ohms 2. Frequency: 0~6 GHz 3. VSWR: ≤1.1 @ 900MHz, ≤1.15 @ 1800MHz, ≤1.2 @ 3000MHz, ≤1.3 @ 6000MHz, 4. Insertion loss: ≤0.05dB @ 900MHz, ≤0.05dB @ 1800MHz, ≤0.05dB @ 3000MHz, ≤0.1dB @ 6000MHz, 5. Dielectric Withstanding voltage:1000V Min 6. Voltage Rating : 500V Max Package : 1 PC per bag Laser Mark: LenoRF						4 3 2 1  Suggested stripping						
						Label Content: LenoRF Part No: 3.01.382 Part Name: RP-SMA PLUG FOR RG141 CABLE QTY: 1 PC Date: WW/YY (Week/year)						
Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°						Material:	See Notes	Weight	g			
						Finish:	See Notes	Scale	8 : 1			
						Unit	mm	Page	01			
						REV.	V1.0	p/n	01			
Drawn						DATA:		Projection		DWG NO.	3.01.382	
Checked						DATA:		Title:	RP-SMA PLUG FOR RG141 CABLE			
Approved						DATA:		Cust P/N.				TBD
A		B		C		D		E		F		