


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	05/06/2025									

4

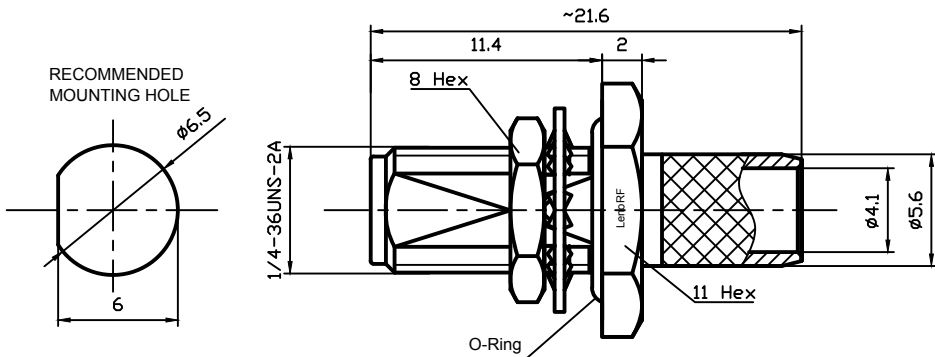

Interface Per: MIL-STD-348, IEC 60169-15






Material & Finishing:

1. Center condutor: Brass, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Gold Plating
4. Other Metal Parts: Brass, Gold Plating
5. Gasket: Silicone Rubber, Red

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~3GHz
3. VSWR: ≤ 1.1 @ 900MHz,
 ≤ 1.2 @ 1800MHz,
 ≤ 1.3 @ 3000MHz,
 ≤ 1.5 @ 6000MHz,
4. Insertion loss: $\leq 0.05\text{dB}$ @ 900MHz,
 $\leq 0.05\text{dB}$ @ 1800MHz,
 $\leq 0.05\text{dB}$ @ 3000MHz,
 $\leq 0.1\text{dB}$ @ 6000MHz,
5. Dielectric Withstanding voltage: 1000V Min
6. Voltage Rating : 500V Max

Package : 1 PC per bag
Laser Mark: LenoRF

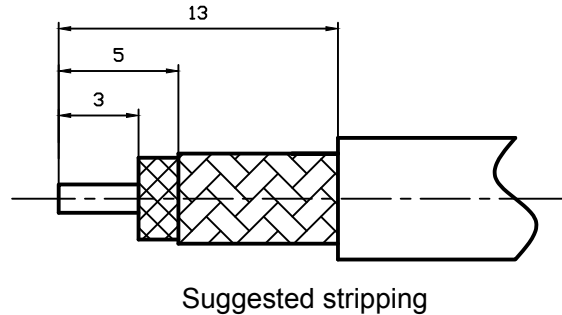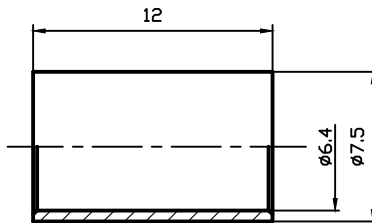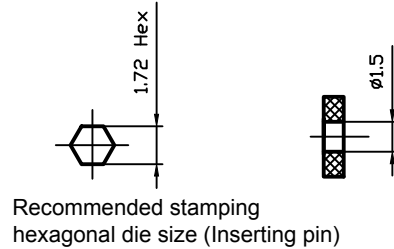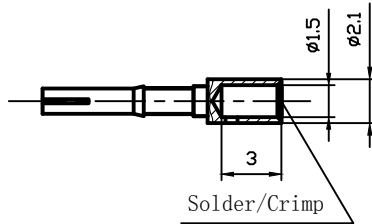

Label Content:

LenoRF
Part No: 3.01.390
Part Name: SMA Female Straight Bulkhead Crimp for LMR240
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified,
tolerances as below:
.X ± 0.15
.XX ± 0.1
.XXX ± 0.05
Angle: $\pm 2^\circ$

Unless otherwise specified, tolerances as below: .xx ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.01.390
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: SMA Female Straight Bulkhead Crimp for LMR240			
Approved		DATA:				

4

3

2

1