


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	22/11/2024									

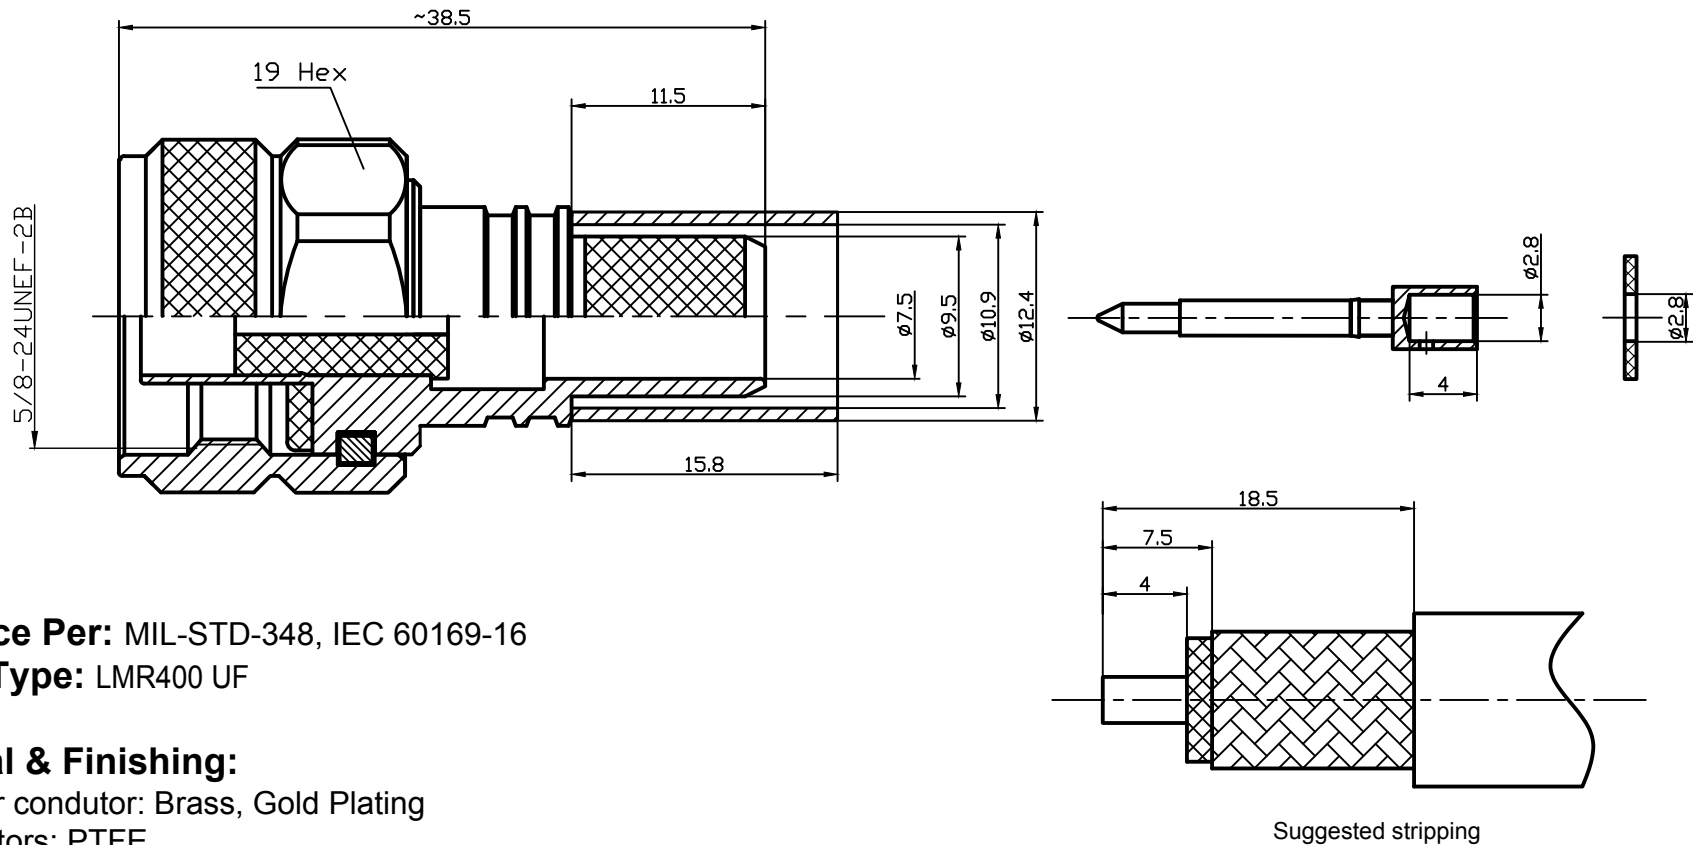


Interface Per: MIL-STD-348, IEC 60169-16
Cable Type: LMR400 UF

Material & Finishing:

- Center condutor: Brass, Gold Plating
- Insulators: PTFE
- Body : Brass, Nickel Plating
- Crimping Ferrule: Soft Copper,Nickel Plating

Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~6GHz
- VSWR: ≤1.3
- Dielectric Withstanding voltage:1000V Min
- Voltage Rating : 500V Max

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.04.0287
	Drawn	DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title:		N PLUG FOR LMR400 UF CABLE	
Approved		DATA:				