
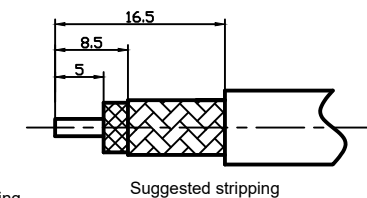




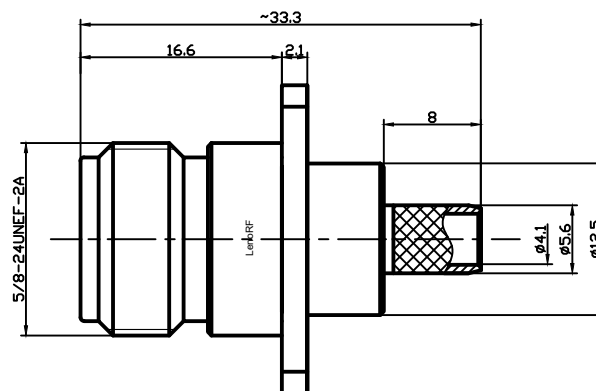


RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	27/10/2025		

RoHS Compliant.

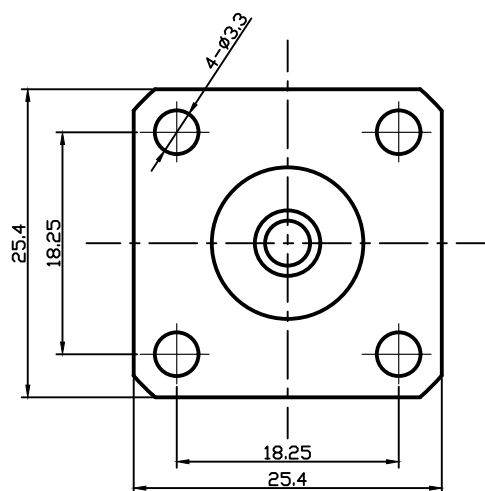

Interface Per: MIL-STD-348, IEC 60169-16
Cable Type: LMR240

Material & Finishing:

- Center conductor: Phosphor bronze, Gold Plating
- Insulators: PTFE
- Body : Brass, Nickel Plating
- Crimping Ferrule: Soft Copper, Nickel Plating

Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~6GHz
- VSWR: ≤ 1.15 @ 900MHz,
 ≤ 1.2 @ 1800MHz,
 ≤ 1.3 @ 3000MHz,
 ≤ 1.4 @ 6000MHz,
- Insertion loss: ≤ 0.05 dB @ 900MHz,
 ≤ 0.05 dB @ 1800MHz,
 ≤ 0.05 dB @ 3000MHz,
 ≤ 0.05 dB @ 6000MHz,
- Dielectric Withstanding voltage: 1000V Min
- Voltage Rating : 500V Max

Package : 1 PC per bag
Laser Mark: LenoRF

Label Content:

LenoRF
Part No: 3.04.0317
Part Name: N JACK FLANGE FOR LMR240 CABLE
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified,
tolerances as below:

.x ± 0.15
.xx ± 0.1
.xxx ± 0.05
Angle: $\pm 2^\circ$

Material:	See Notes	Weight	g		
Finish:	See Notes	Scale	8 : 1		
Unit	mm	Page	01		
REV.	V1.0	p/n	01		
Drawn	DATA:	Projection		DWG NO.	3.04.0317
Checked	DATA:	Title:	N JACK FLANGE FOR LMR240 CABLE		
Approved	DATA:				
				Cust P/N.	TBD