


A		B		C	
RevNo	Revision note	Date		Signature	Checked
V1.0	Sketch only	06/06/2025			

RoHS Compliant.

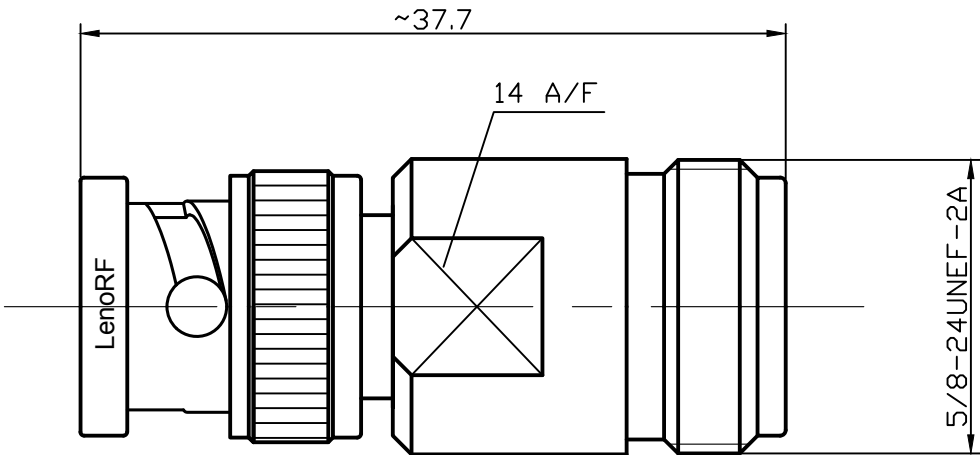

Interface Per: MIL-STD-348,

Material & Finishing:

- 1. Center condutor: Phosphor bronze, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Nickel Plating


Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~6GHz
- 3. VSWR: ≤1.05 @ 900MHz,
≤1.1 @ 1800MHz,
≤1.2 @ 3000MHz,
≤1.35 @ 6000MHz
- 4. Insertion loss: ≤0.05dB @ 900MHz,
≤0.05dB @ 1800MHz,
≤0.05dB @ 3000MHz,
≤0.1dB @ 6000MHz,
- 5. Proof Voltage : 750 Veff
- 6. Working voltage: 350 Veff

Package : 1 PC per bag
Laser Mark: LenoRF

Label Content:

LenoRF	
Part No: 3.17.143	
Part Name: BNC PLUG TO N JACK RF ADAPTER	
QTY: 1 PC	
Date: WW/YY (Week/year)	

Unless otherwise specified, tolerances as below: .X ±0.15 .XX ±0.1 .XXX ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	3.5 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.17.143
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: BNC PLUG TO N JACK RF ADAPTER			
Approved		DATA:				