


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked	RoHS Compliant.					
V1.0	Sketch only	30/08/2025									

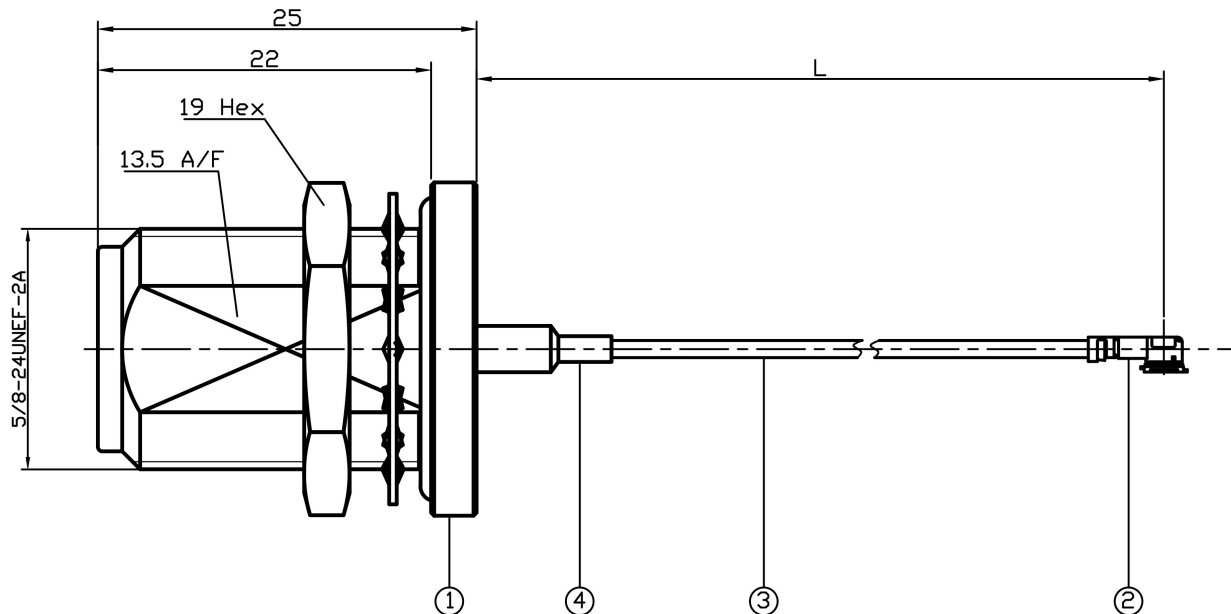

1. N jack connector
2. IPEX MHFI connector
3. RG178 cable
4. Heat shrink tubing Black

Material & Finishing:

- N jack connector
1. Center condutor: Brass, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Nickel Plating
4. Crimping Ferrule: Soft Copper, Nickel Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: 1.35 Max
4. Dielectric Withstanding voltage:200v Min
5. Voltage Rating : 60v Max

CODE	L(CM)	CUSTOMER CODE
3.19.186-15 CM	15	TBD
3.19.186-30 CM	30	TBD

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.19.186
	Drawn	DATA:	Projection		Cust P/N.	TBD
Checked	DATA:	Title: N JACK TO IPEX MHFI FOR RG178 CABLE				
Approved	DATA:					