


Electrical Characteristics	
Cable or Adaptor	RG316
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30 @3 GHz



The totale length ≤ 200mm  
 Connector to be oriented with U.FL connector mating face , as drawing Shown

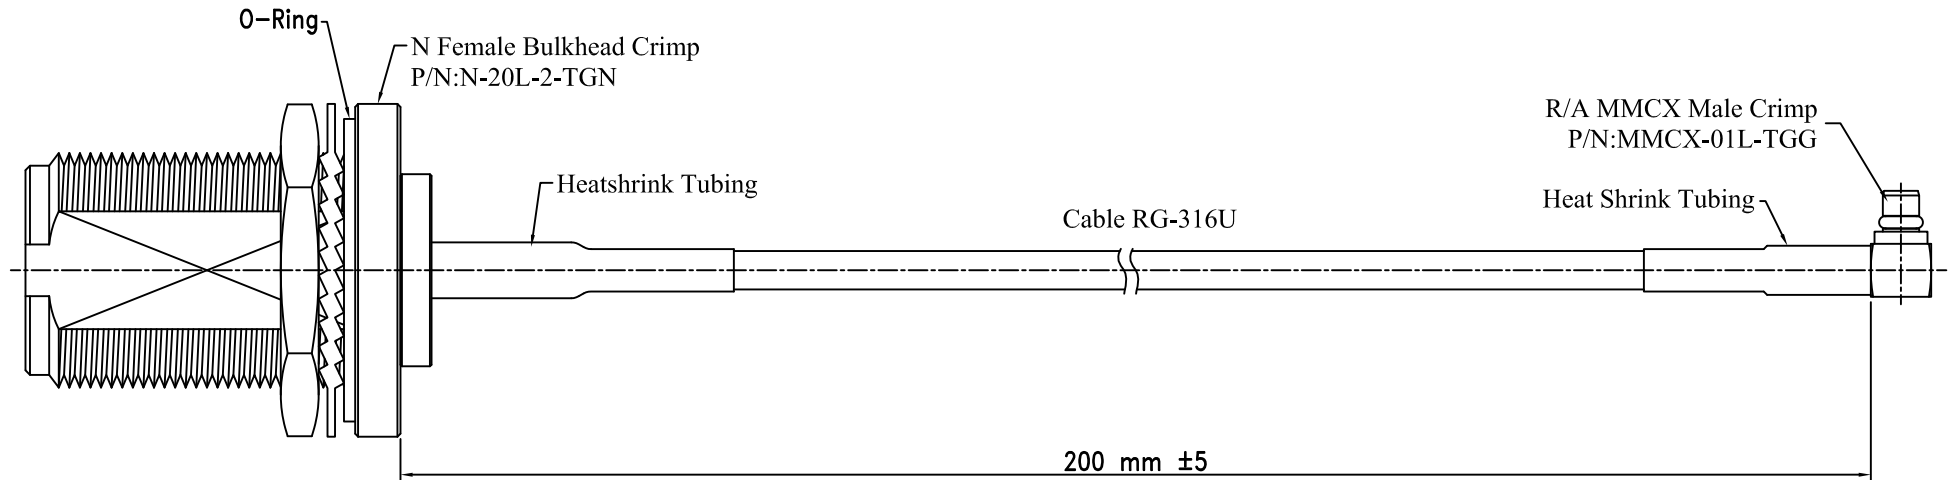

NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH
2.	MMCX-01L-TGG	Brass	1	Gold
1.	N-20L-2-TGN	Brass	1	Nickel

繪圖DRAWN	SCALE	UNITS		夏尼有限公司	
Kelly	比例 2:1	單位 mm		SHINING PRECISION CO., LTD	
審核CHECKED	公差TOLERANCE		圖名	CB-316U-045-020	
Peter	.X	±0.2	TITLE		
主管APPROVAL	.XX	±0.1	版次REV.	電腦圖檔CAD FILE	日期DATE
Peter	.XXX	±0.05	A	C:/Shining/Cable/316U/CB-316U-045-020.dwg	2024.04.29
	ANGLE	±0.5°			