



# IPPBX IX140

**IX140** is an open source asterisk-based complete IPPBX solution for SMB. Based on plug-in modular design, IX140 is a standard 19" 1U appliance. It

allows users to integrate up to 2 pieces of OpenVox PCI-E telephony cards, with combinations of analog, BRI, PRI, GSM. With the push-button, the storage device is easy to plug and draw.

**IX140** supports comprehensive protocol processing, including SIP, H.323 protocols in IP side and BRI, PRI, SS7, GSM and some protocols in CPE.

*3-Month "No Questions Asked"  
Return Policy  
Two-Year Warranty*

## Physical Specifications

- ▶ **Size:** 44cm × 4.5cm × 30cm
- ▶ **Weight:** 5200g (Telephony cards not included)
- ▶ **Alternative Power:**
  - Input: 100-240VAC 0.8A, 50/60Hz
  - Output: 12VDC, 5A
- ▶ **Temperature:** 0 ~ 50°C (Operation)  
- 40 ~ 125°C (Storage)
- ▶ **Humidity:** 10 ~ 90% NON-CONDENSING

## Interfaces and Ports

- ① ② Telephony Cards Area
- ③ Open/Close Button
- ④ VGA Interface
- ⑤ Two Gigabit Network Ports
- ⑥ Two USB Ports
- ⑦ HDD
- ⑧ DC Power Interface (External and Optional)
- ⑨ AC Power Interface (Built-in and Optional)

- Optional Pre-loaded Free Open Source IPPBX System
- Combination of FXS/FXO, BRI, E1/T1/GSM Interface
- PRI/SS7 To SIP Gateway, To TDMoE Gateway
- PRI/SS7/FXS/FXO/BRI Signaling Converter
- Flexible Applications Selection (IPPBX Or Firewall)
- Up to 8 Simultaneous GSM Calls

IX140 supports combination of two cards, for example:


- ▶ A810E + B400E
- ▶ D230E + B400E
- ▶ D230E + A1610E
- ▶ D230E + A810E
- ▶ A810E + A810E

**More information, please contact sales.**

Front Panel



Rear Panel

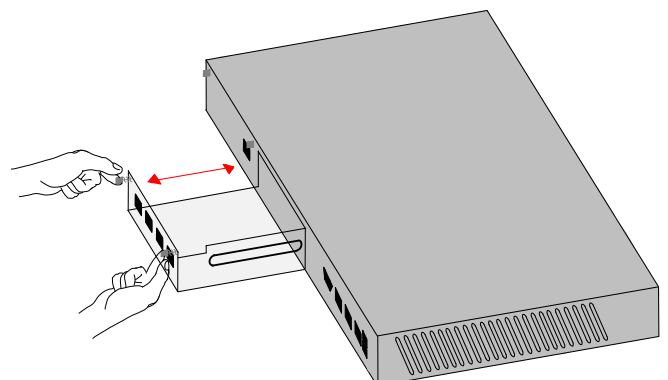

# IPPBX IX140

## 快速安装指南



Optional Pre-loaded Free Open Source IPPBX System

Combination of FXS/FXO, BRI, E1/T1/GSM Interface

PRI/SS7 To SIP Gateway, To TDMoE Gateway

PRI/SS7/FXS/FXO/BRI Signaling Converter

Flexible Applications Selection (IPPBX Or Firewall)

Up to 8 Simultaneous GSM Calls

IX140支持以下两种卡的组合:

- ▶ A810E + B400E
- ▶ D230E + B400E
- ▶ D230E + A1610E
- ▶ D230E + A810E
- ▶ A810E + A810E

如需了解更多关于语音卡的组合, 欢迎咨询销售人员。

三个月内无条件退货  
两年质保

### 前、后面板接口

- ① ② 语音卡
- ③ 开/关按钮
- ④ VGA接口
- ⑤ 2个10/100/1000M以太网接口
- ⑥ 2个USB接口
- ⑦ 硬盘
- ⑧ 可选外置DC电源接口
- ⑨ 可选AC电源接口


**IX140**是完全基于Asterisk开源平台的SMB IPPBX, 该产品适用模块化插板式设计, 在1U机箱内集成两张PCI-E语音卡, 并且允许客户根据需求随意搭配模拟、BRI、PRI、GSM语音卡。硬盘可以通过按钮抽拉, 安装灵活方便。

**IX140**全面支持信令处理, 包括在互联网端的SIP, H.323及在CPE端的BRI, PRI, SS7, GSM及其他信令。

### 规格参数

- ▶ 尺寸: 44cm × 4.5cm × 30cm
- ▶ 重量: 5200g (不包含语音卡)
- ▶ 电源: AC/DC电源适配器(内/外置可选)  
输入: 100-240VAC 0.8A, 50/60Hz  
输出: 12VDC, 5A
- ▶ 温度: 0 ~ 50°C (运行)  
- 40 ~ 125°C (存储)
- ▶ 湿度: 10 ~ 90% 无凝结

### Front Panel



### Rear Panel

