


Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0 ~ 6 GHz
V.S.W.R.	≦ 1.3 Max.

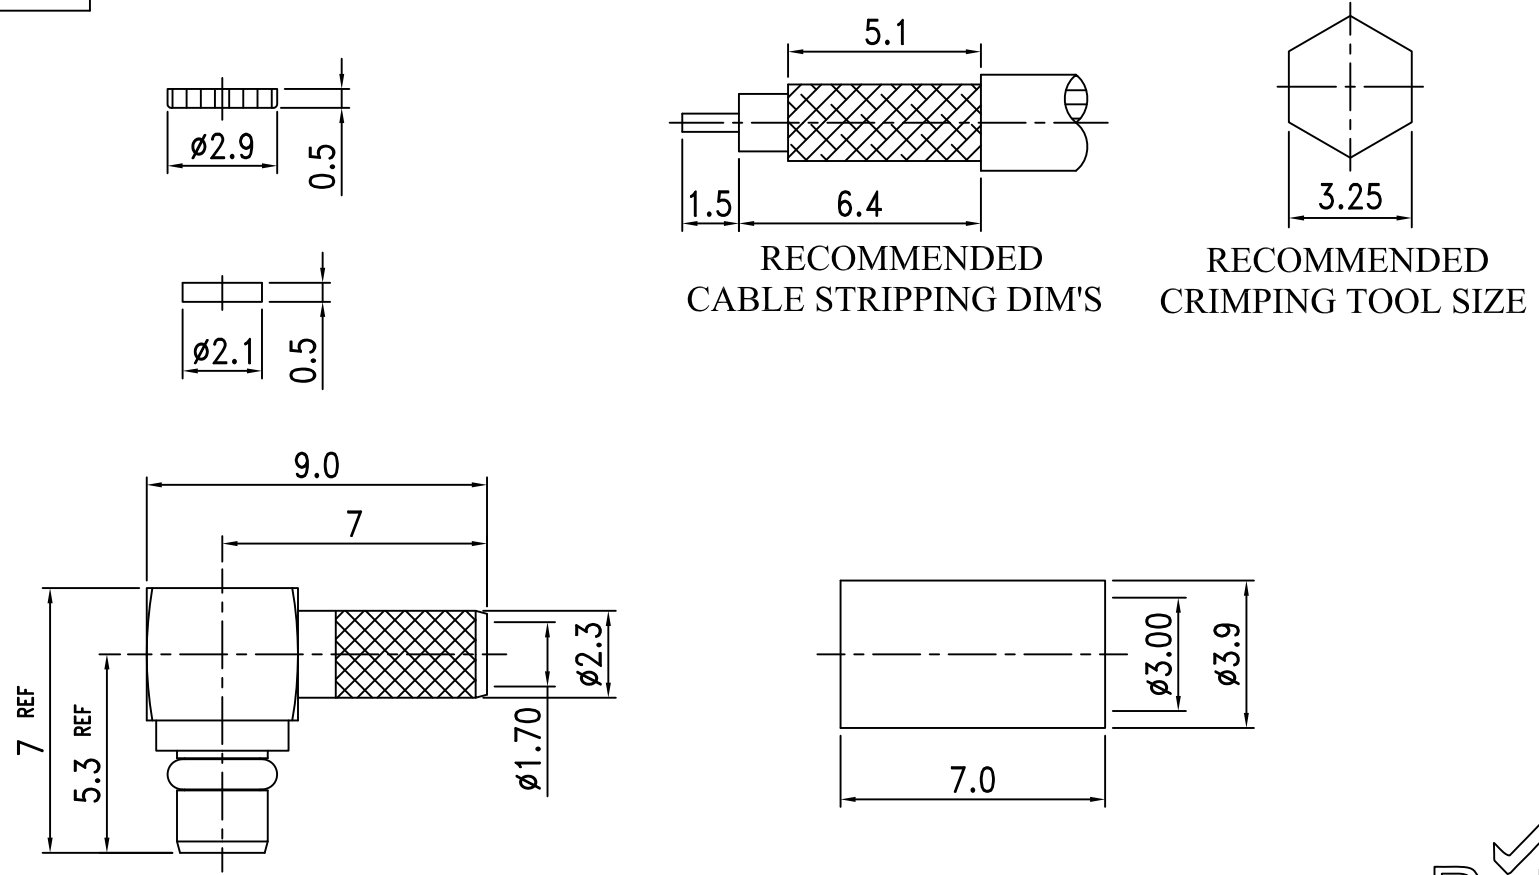

7.	Ferrule	Brass	1	Gold
6.	Washer	Brass	1	Gold
5.	Retaining Ring	Beryllium	1	Gold
4.	Insulation	Delrin	1	None
3.	Insulation	PTFE	1	White
2.	Pin	Phosphor Bronze	1	Gold
1.	Body	Brass	1	Gold
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS
Jenny	比例 5:1	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	±0.2
主管APPROVAL	.XX	±0.1
	.XXX	±0.05
Peter	ANGLE	±0.5°

	夏尼有限公司 SHINING PRECISION CO., LTD	
圖名 TITLE	MMCX-01L-TGG For Cable RG-174U	
版次REV.	電腦圖檔CAD FILE	日期DATE
A	C:/SHINING/MMCX-PARTS/MMCX-01L.DWG	2006.06.05