

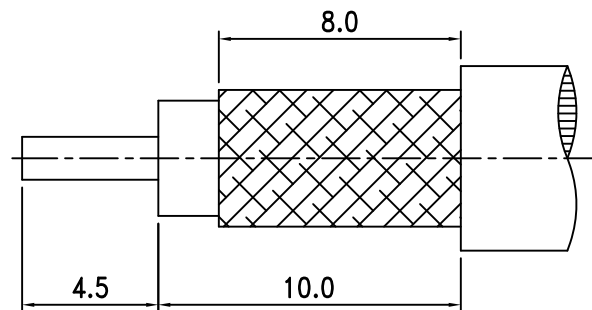


Electrical Characteristics	
Cable or Adaptor	LMR240
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 1000 Vrms
Dielectric Withstanding Voltage	≤ 2500 Vrms



NO.	DESCRIPTION	DATE
$\triangle$	$\phi 4.00 \rightarrow \phi 4.10$	2018.01.24

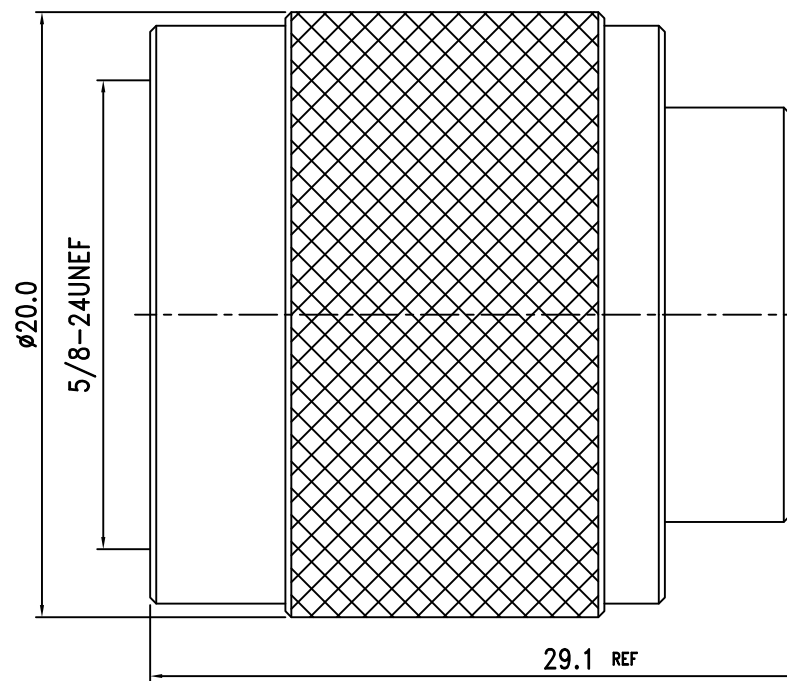

RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
CRIMPING TOOL SIZE

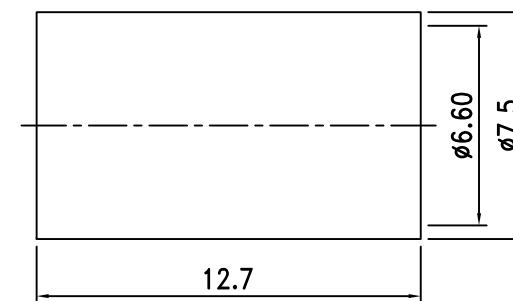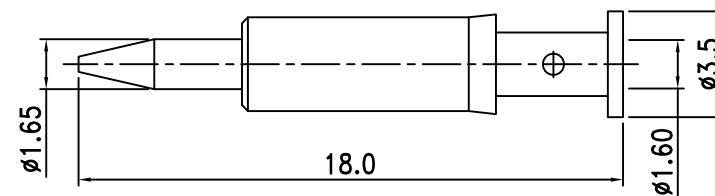

ROHS
COMPLIANT

8.	Ferrule	Brass	1	Nickel
7.	Gasket	Si-Rubber	1	Red
6.	Retaining Ring	Brass	1	None
5.	Shell	Brass	1	Nickel
4.	Pin	Brass	1	Gold
3.	Insulation	PTFE	1	White
2.	Chassis	Brass	1	Nickel
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS	 夏尼有限公司 SHINING PRECISION CO., LTD	
Kelly	比例 4:1	單位 mm		
審核CHECKED	公差TOLERANCE		圖名 TITLE	N-04LM-1-TGN For Cable LMR-240
Peter	.X	± 0.2	版次REV.	電腦圖檔CAD FILE
主管APPROVAL	.XX	± 0.1	日期DATE	
Peter	.XXX	± 0.05		
	ANGLE	$\pm 0.5^\circ$	B-1	C:/SHINING/N-PARTS/N-04LM-1.DWG
				2015.01.17