






Electrical Characteristics	
Cable or Adaptor	LMR400
Impedance	50 Ω
Frequency Range	DC - 11 GHz
V.S.W.R.	≦ 1.25
Working Voltage	≦ 1000 Vrms
Dielectric Withstanding Voltage	≦ 2500 Vrms

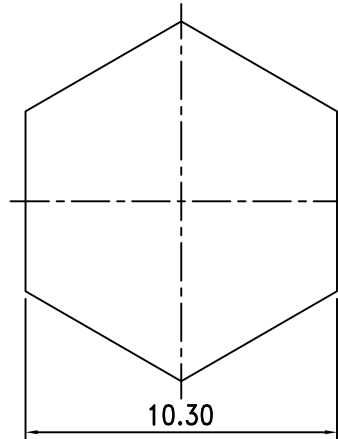

RECOMMENDED CRIMPING TOOL SIZE

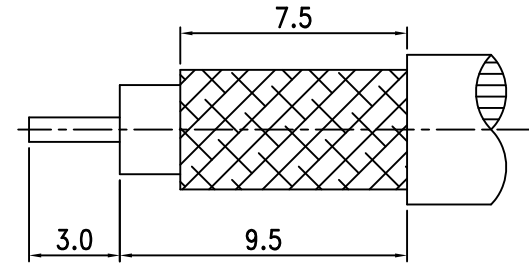

RECOMMENDED CABLE STRIPPING DIM'S

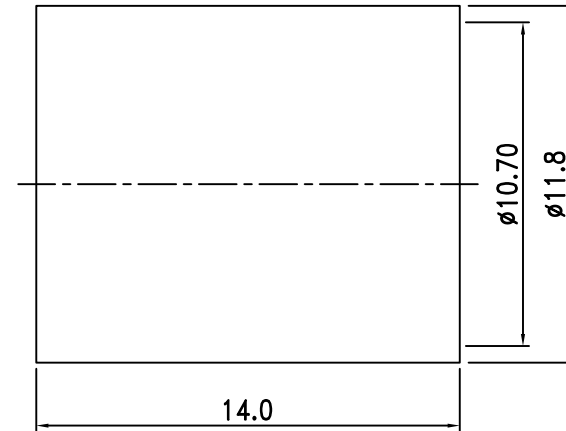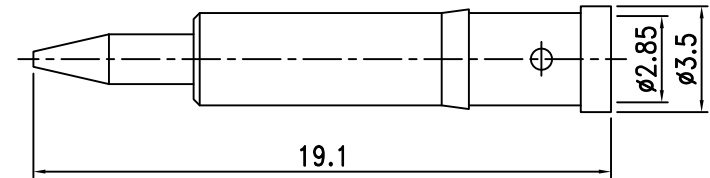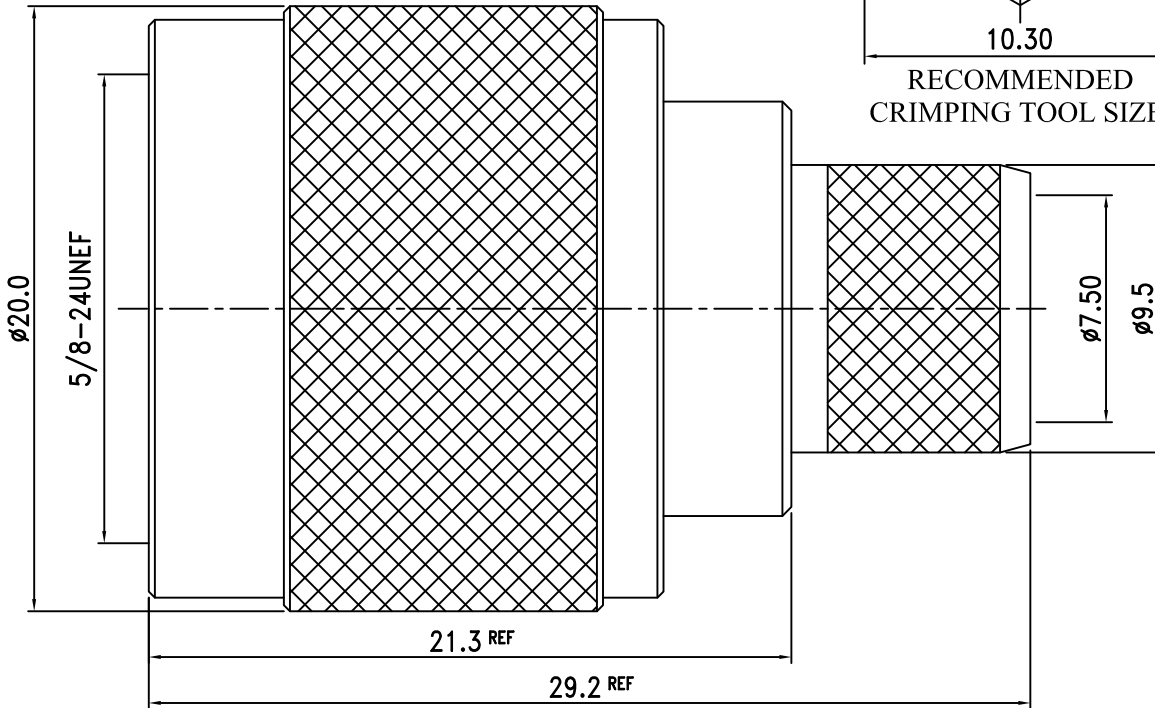

ROHS COMPLIANT

8.	Ferrule	Brass	1	Nickel
7.	Gasket	Si-Rubber	1	Red
6.	Retaining Ring	Brass	1	None
5.	Shell	Brass	1	Nickel
4.	Pin	Brass	1	Gold
3.	Insulation	PTFE	1	White
2.	Chassis	Brass	1	Nickel
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS
Jenny	比例 4:1	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	±0.2
主管APPROVAL	.XX	±0.1
Peter	.XXX	±0.05
	ANGLE	±0.5°



夏尼有限公司  
SHINING PRECISION CO., LTD

圖名  
TITLE  
版次REV.  
C

N-04T-TGN  
For Cable LMR-400 / LMR-400UF  
電腦圖檔CAD FILE  
日期DATE  
C:/SHINING/N-PARTS/N-04T-RO.DWG  
2007.01.15