


Electrical Characteristics	
Cable or Adaptor	N Male to N Male Adaptor
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≦ 1.25
Working Voltage	≦ 1000 Vrms
Dielectric Withstanding Voltage	≦ 2500 Vrms



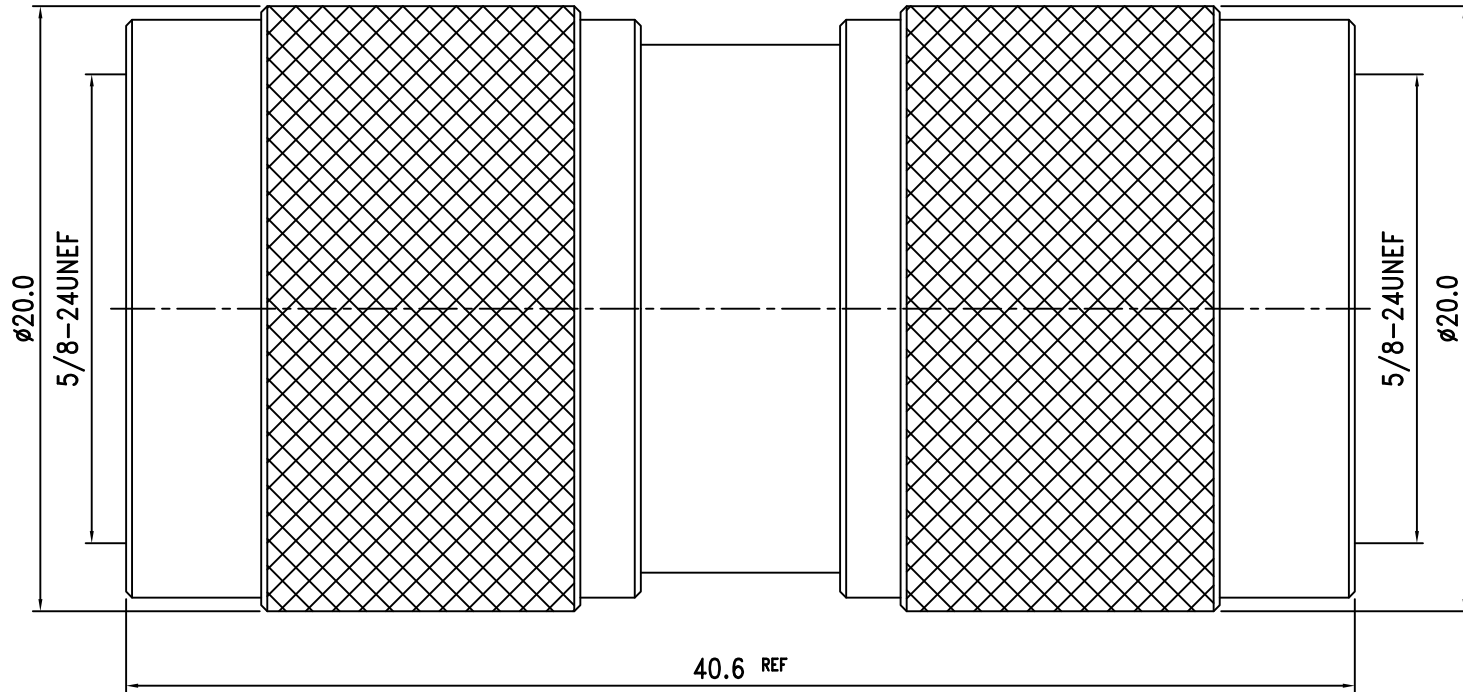

ROHS
 COMPLIANT

7.	Shell	Brass	2	Nickel
6.	Gasket	Silicone	2	Red
5.	Retaining Ring	Brass	2	None
4.	Chassis	Brass	2	Nickel
3.	Insulation	PTFE	2	White
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS
Jenny	比例 4:1	單位 mm
審核CHECKED	公差TOLERANCE	
Peter	.X	±0.2
主管APPROVAL	.XX	±0.1
	.XXX	±0.05
Peter	ANGLE	±0.5°



夏尼有限公司
SHINING PRECISION CO., LTD

圖名
TITLE

N-08-TGN

版次REV.

電腦圖檔CAD FILE

日期DATE

C

C:/SHINING/N-PARTS/N-08.DWG

2007.06.18