








Electrical Characteristics	
Cable or Adaptor	RG178
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.40
Working Voltage	≤ 1000 Vrms
Dielectric Withstanding Voltage	≤ 2500 Vrms

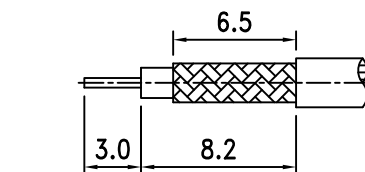

RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
CRIMPING TOOL SIZE

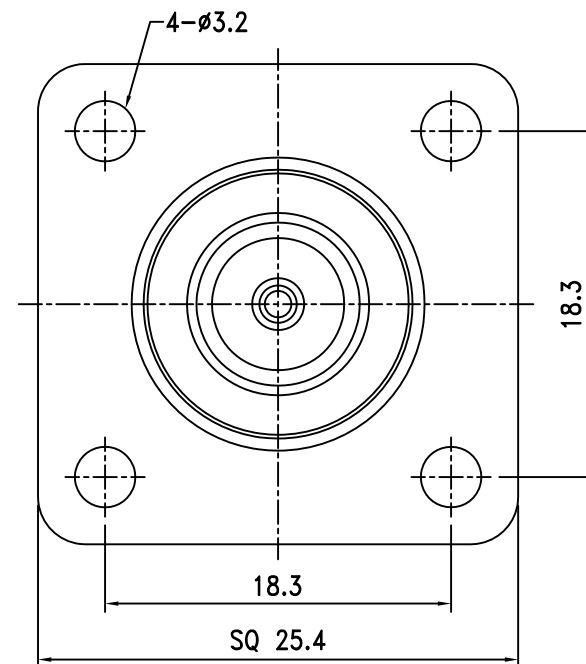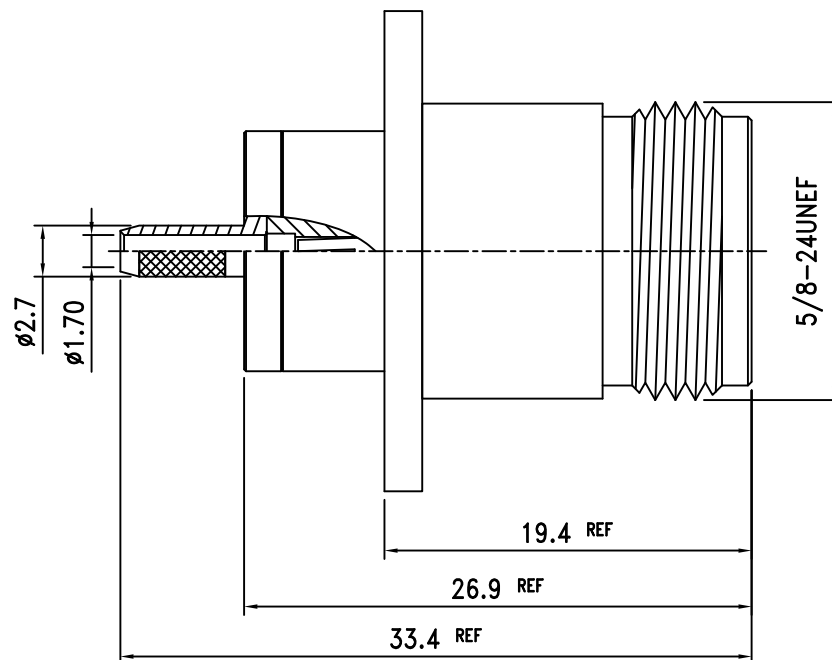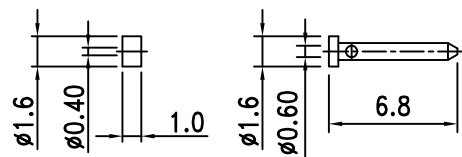

9.	Washer	Brass	1	Nickel
8.	Ferrule	Brass	1	Nickel
7.	Ferrule	Brass	1	Nickel
6.	Insulation	PTFE	1	White
5.	Insulation	PTFE	1	White
4.	Pin	Brass	1	Gold
3.	Pin	Brass	1	Gold
2.	Barrel	Brass	1	Nickel
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS	夏尼有限公司 SHINING PRECISION CO., LTD	
Kelly	比例 10:4	單位 mm		
審核CHECKED	公差TOLERANCE		圖名 TITLE	N-38M-1-TGN For Cable RG-178U
Peter	.X	±0.2	版次REV.	電腦圖檔CAD FILE
主管APPROVAL	.XX	±0.1	A	日期DATE
Peter	.XXX	±0.05		C:/SHINING/N-PARTS/N-38M-1.DWG
	ANGLE	±0.5°		2015.02.19

ROHS
COMPLIANT