

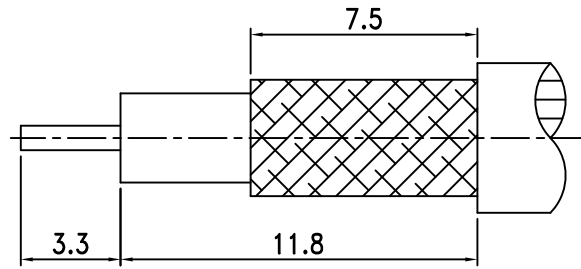


Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0 ~ 6 GHz
V.S.W.R.	≦ 1.3 Max.





RECOMMENDED
CABLE STRIPPING DIM'S

NO.	DESCRIPTION	DATE
△	φ4.00 → φ4.10	2021.04.01



RECOMMENDED
CRIMPING TOOL SIZE

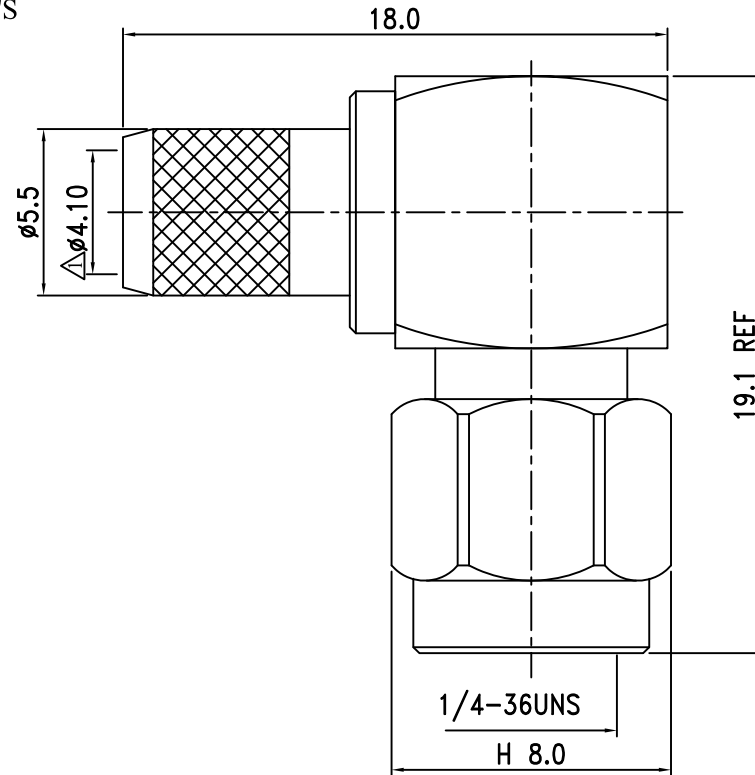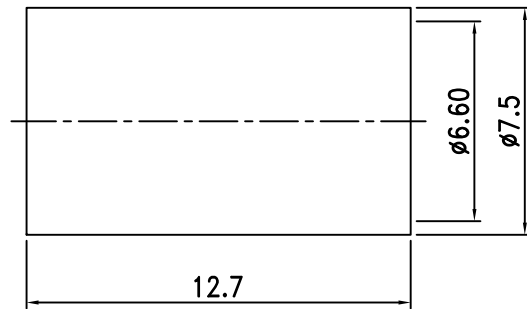

ROHS
COMPLIANT

9.	Ferrule	Brass	1	Gold
8.	Press it Washer	Brass	1	Gold
7.	Shell	Brass	1	Gold
6.	Gasket	Silicone	1	Red
5.	Retaining Ring	SUS304	1	None
4.	Insulation	PTFE	1	White
3.	Pin	Brass	1	Gold
2.	Barrel	Brass	1	Gold
1.	Body	Brass	1	Gold
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS	夏尼有限公司 SHINING PRECISION CO., LTD	
Kelly	比例 4:1	單位 mm	圖名 TITLE SMA-01LM-S2-TGG For Cable LMR240	
審核CHECKED	公差TOLERANCE			
Peter	.X	±0.2	版次REV.	電腦圖檔CAD FILE
主管APPROVAL	.XX	±0.1	日期DATE	
Peter	.XXX	±0.05	A-1	C:/SHINING/SMA-PARTS/SMA-01LM-S2.DWG
	ANGLE	±0.5°		2017.11.02