







Electrical Characteristics	
Cable or Adaptor	RG178
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 250 Vrms
Dielectric Withstanding Voltage	≤ 750 Vrms



RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
CRIMPING DIMENSIONS

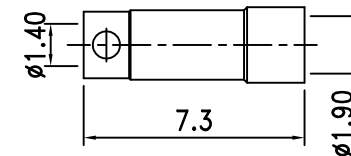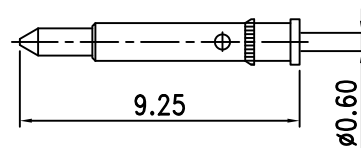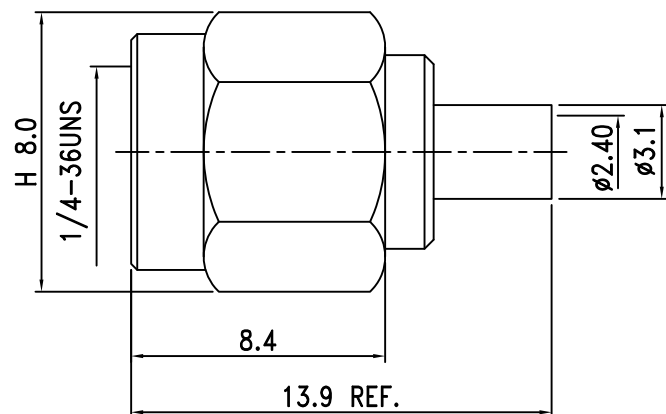

ROHS
COMPLIANT

8.	Ferrule	Brass	1	Nickel
7.	Shell	Brass	1	Gold
6.	Gasket	Silicone	1	Red
5.	Retaining Ring	Beryllium	1	None
4.	Insulation	PTFE	1	None
3.	Insulation	PTFE	1	None
2.	Pin	Brass	1	Gold
1.	Body	Brass	1	Gold
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS	夏尼有限公司 SHINING PRECISION CO., LTD	
Kelly	比例 4:1	單位 mm		
審核CHECKED	公差TOLERANCE		圖名 TITLE	SMA-02M-1-TGG For Cable RG-178
Peter	.X	± 0.2	版次REV.	電腦圖檔CAD FILE
主管APPROVAL	.XX	± 0.1	日期DATE	
	.XXX	± 0.05		
Peter	ANGLE	$\pm 0.5^\circ$	A	C:/SHINING/SMA-FINISH/SMA-02M-1.DWG
				2018.12.15