


Electrical Characteristics	
Cable or Adaptor	SMA Female to N Male Adaptor
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 480 Vrms
Dielectric Withstanding Voltage	≤ 1000 Vrms

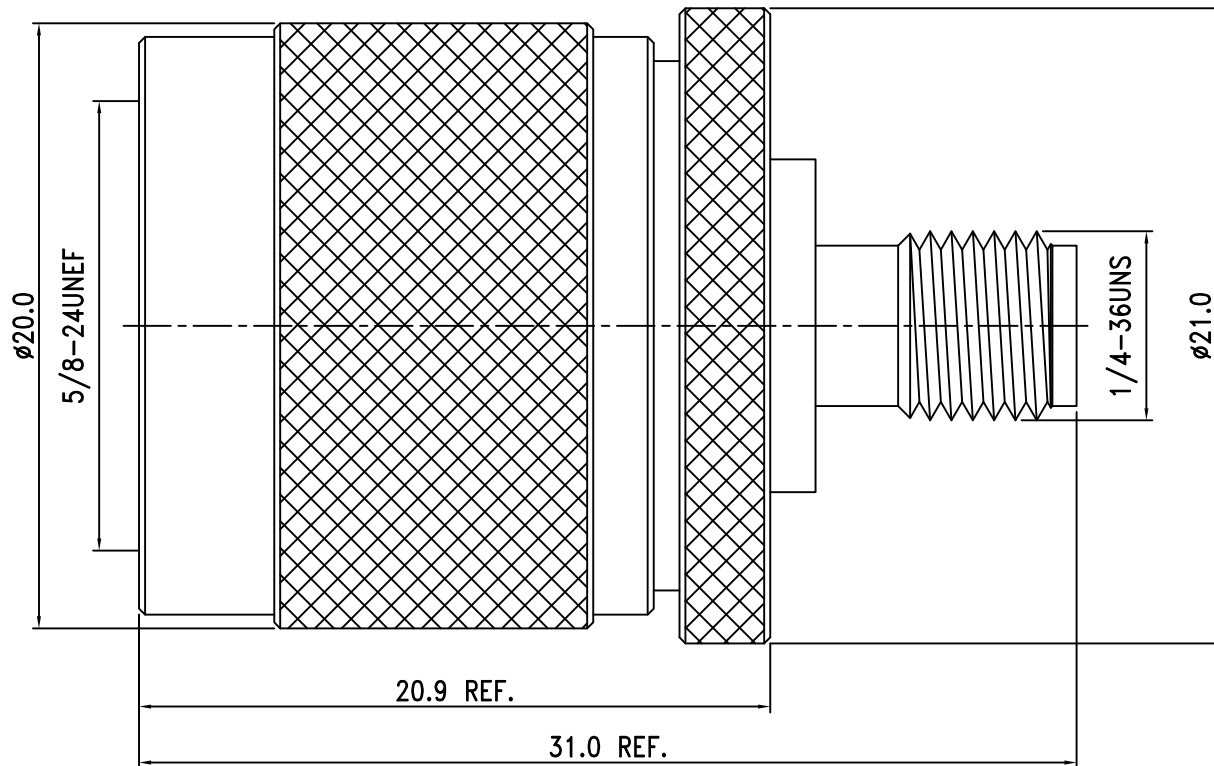

9.	Shell	Brass	1	Nickel
8.	Gasket	Silicone	1	Red
7.	Retaining Ring	Brass	1	Nickel
6.	Chassis	Brass	1	Nickel
5.	Insulation	PTFE	1	White
4.	Insulation	PTFE	1	White
3.	Pin	Brass	1	Gold
2.	Body	Brass	1	Nickel
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

ROHS
COMPLIANT

繪圖DRAWN	SCALE	UNITS		夏尼有限公司	
Jenny	比例 4:1	單位 mm		SHINING PRECISION CO., LTD	
審核CHECKED	公差TOLERANCE		圖名	SMA-09-TGN	
Peter	.X	±0.2	TITLE		
主管APPROVAL	.XX	±0.1	版次REV.	電腦圖檔CAD FILE	日期DATE
	.XXX	±0.05	B	C:/SHINING/ADAP-PARTS/SMA-09.DWG	2005.03.14
Peter	ANGLE	±0.5°			