


Electrical Characteristics	
Cable or Adaptor	SMA Male to N Female Adaptor
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≦ 1.30
Working Voltage	≦ 480 Vrms
Dielectric Withstanding Voltage	≦ 1000 Vrms

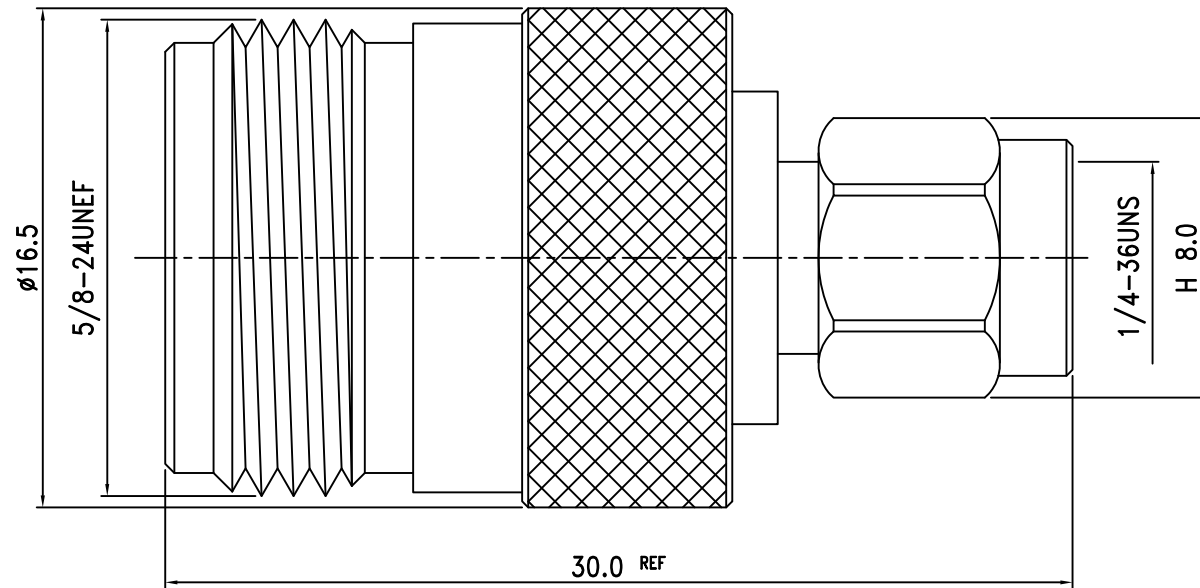

ROHS
COMPLIANT

8.	Shell	Brass	1	Nickel
7.	Gasket	Silicone	1	Red
6.	Retaining Ring	Stainless Steel	1	None
5.	Insulation	PTFE	1	White
4.	Insulation	PTFE	1	White
3.	Pin	Brass	1	Gold
2.	Body	Brass	1	Nickel
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS	夏尼有限公司 SHINING PRECISION CO., LTD	
Jenny	比例 4:1	單位 mm		
審核CHECKED	公差TOLERANCE			
Peter	.X	±0.2	圖名 TITLE	SMA-10-S2-TGN
主管APPROVAL	.XX	±0.1	版次REV.	電腦圖檔CAD FILE
	.XXX	±0.05		日期DATE
Peter	ANGLE	±0.5°	A	C:/SHINING/ADAP-PARTS/SMA-10-S2.DWG 2016.05.31