






Electrical Characteristics	
Cable or Adaptor	RG58
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 250 Vrms
Dielectric Withstanding Voltage	≤ 750 Vrms

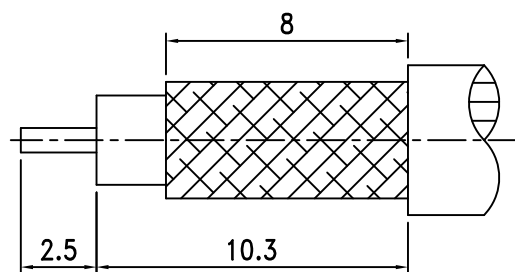



RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
CRIMPING TOOL SIZE

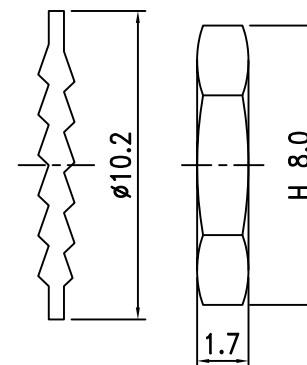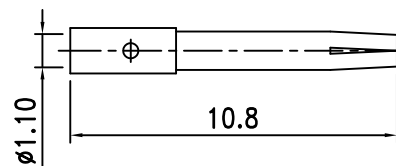

RECOMMENDED
MOUNTING HOLE

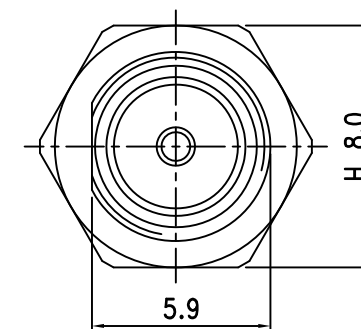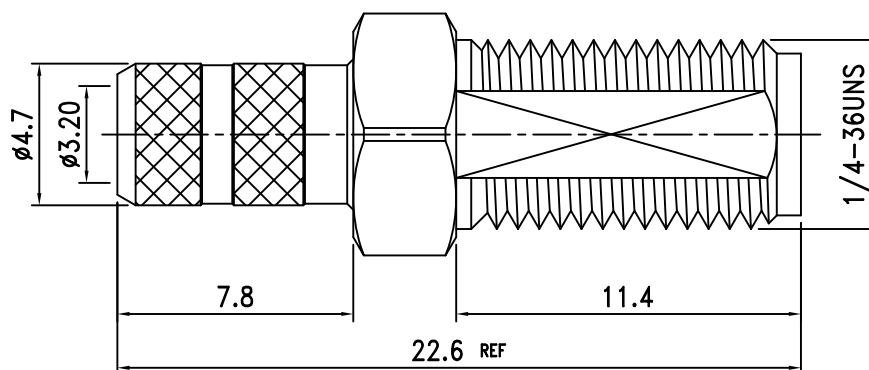

ROHS
COMPLIANT

NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH
6.	Ferrule	Brass	1	Gold
5.	Nut	Brass	1	Gold
4.	Washer	Brass	1	Gold
3.	Insulation	PTFE	1	White
2.	Pin	Beryllium	1	Gold
1.	Body	Brass	1	Gold

繪圖DRAWN	SCALE	UNITS	夏尼有限公司 SHINING PRECISION CO., LTD	
Jenny	比例 4:1	單位 mm		
審核CHECKED	公差TOLERANCE		圖名	SMA-15F-TGG
Peter	.X	±0.2	TITLE	For Cable RG58U / CFD195
主管APPROVAL	.XX	±0.1	版次REV.	電腦圖檔CAD FILE
Peter	.XXX	±0.05	A	日期DATE
	ANGLE	±0.5°		C:/Shining/SMA-Finish/LUS/SMA-15F.DWG
				2017.06.06