
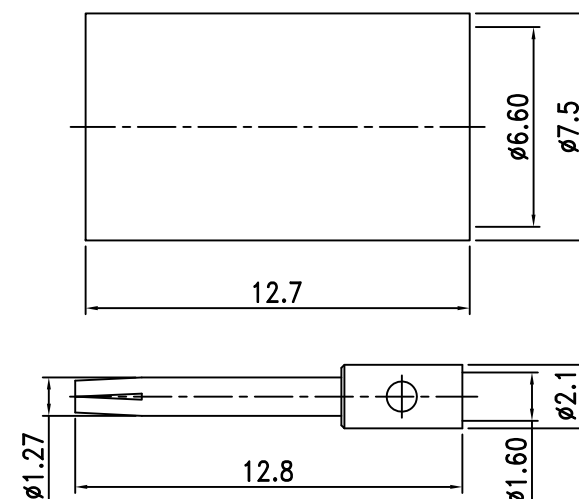
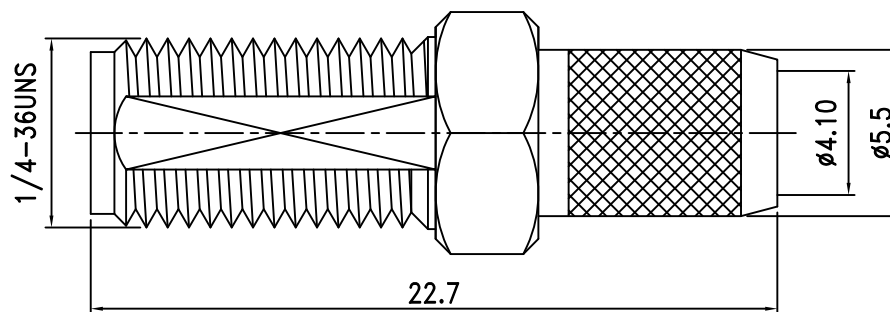
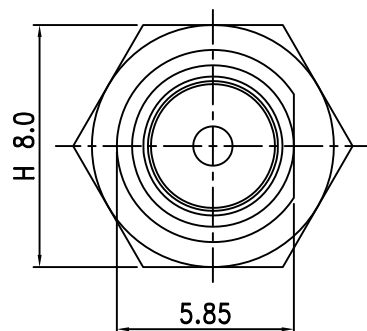
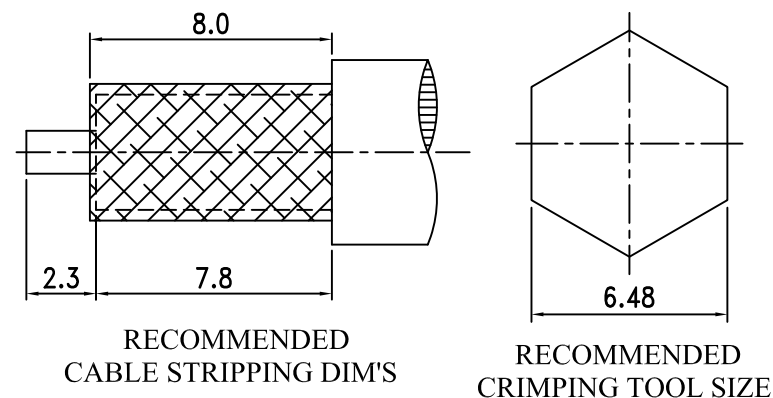


Electrical Characteristics	
Cable or Adaptor	LMR240
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 250 Vrms
Dielectric Withstanding Voltage	≤ 750 Vrms

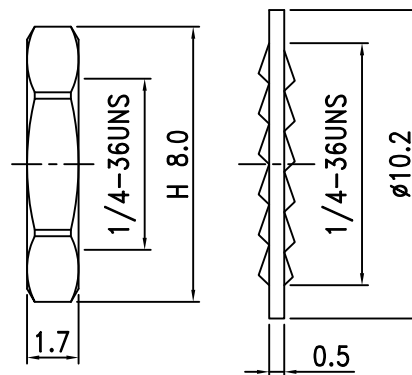

ROHS
COMPLIANT

NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH
6.	Nut	Brass	1	Gold
5.	Washer	Brass	1	Gold
4.	Ferrule	Brass	1	Gold
3.	Insulation	PTFE	1	White
2.	Pin	Phosphor Bronze	1	Gold
1.	Body	Brass	1	Gold

繪圖DRAWN	SCALE	UNITS	夏尼有限公司 SHINING PRECISION CO., LTD	
Jack	比例 4:1	單位 mm		
審核CHECKED	公差TOLERANCE		圖名 TITLE	SMA-15LM-TGG For Cable LMR-240
Peter	.X	± 0.2	版次REV.	電腦圖檔CAD FILE
主管APPROVAL	.XX	± 0.1	A C:/SHINING/SMA-PARTS/SMA-15LM(Z).DWG 2015.08.19	
Peter	.XXX	± 0.05		
	ANGLE	$\pm 0.5^\circ$		