
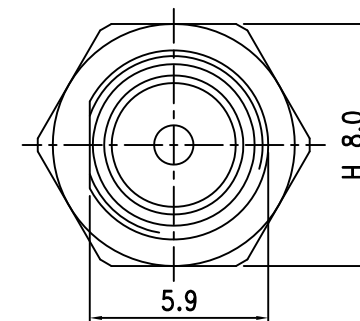
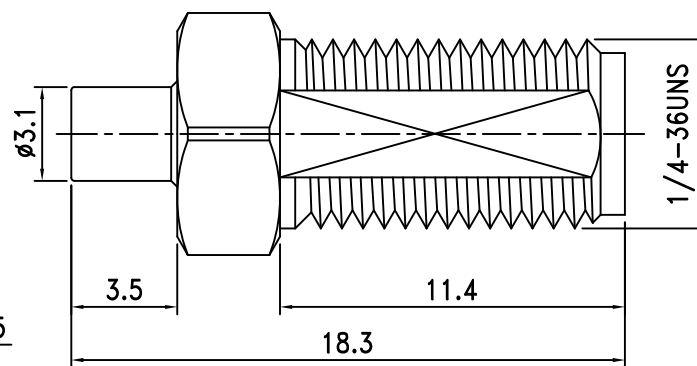
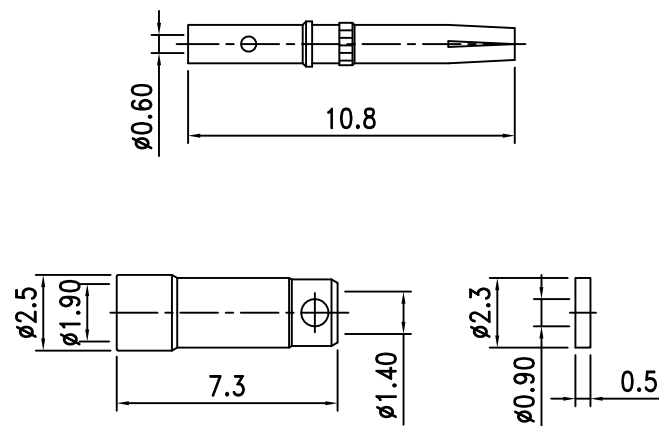
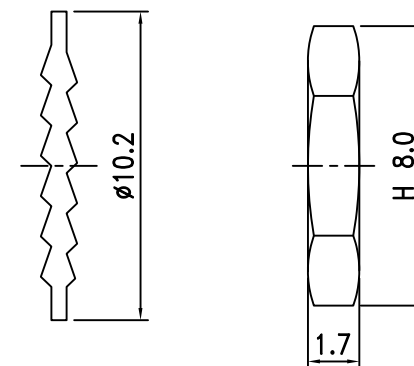



Electrical Characteristics	
Cable or Adaptor	RG178
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 250 Vrms
Dielectric Withstanding Voltage	≤ 750 Vrms

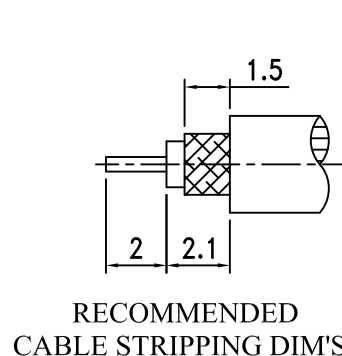

ROHS
COMPLIANT

7.	Nut	Brass	1	Gold
6.	Washer	Brass	1	Gold
5.	Ferrule	Brass	1	Nickel
4.	Insulation	PTFE	1	White
3.	Insulation	PTFE	1	White
2.	Pin	Beryllium	1	Gold
1.	Body	Brass	1	Gold
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE		UNITS			夏尼有限公司 SHINING PRECISION CO., LTD		
Jenny	比例	4:1	單位	mm				
審核CHECKED	公差TOLERANCE				圖名 TITLE	SMA-15M-TGG For Cable 178		
Peter	.X		±0.2		版次REV.			
主管APPROVAL	.XX		±0.1			電腦圖檔CAD FILE		日期DATE
	.XXX		±0.05		A	C:/SHINING/SMA-FINISH/LUS/SMA-15M.DWG		2017.06.16
Peter	ANGLE		±0.5°					