


Electrical Characteristics	
Cable or Adaptor	SMA Male to N Male Adaptor
Impedance	50 Ω
Frequency Range	DC - 6 GHz
V.S.W.R.	≤ 1.30
Working Voltage	≤ 480 Vrms
Dielectric Withstanding Voltage	≤ 1000 Vrms

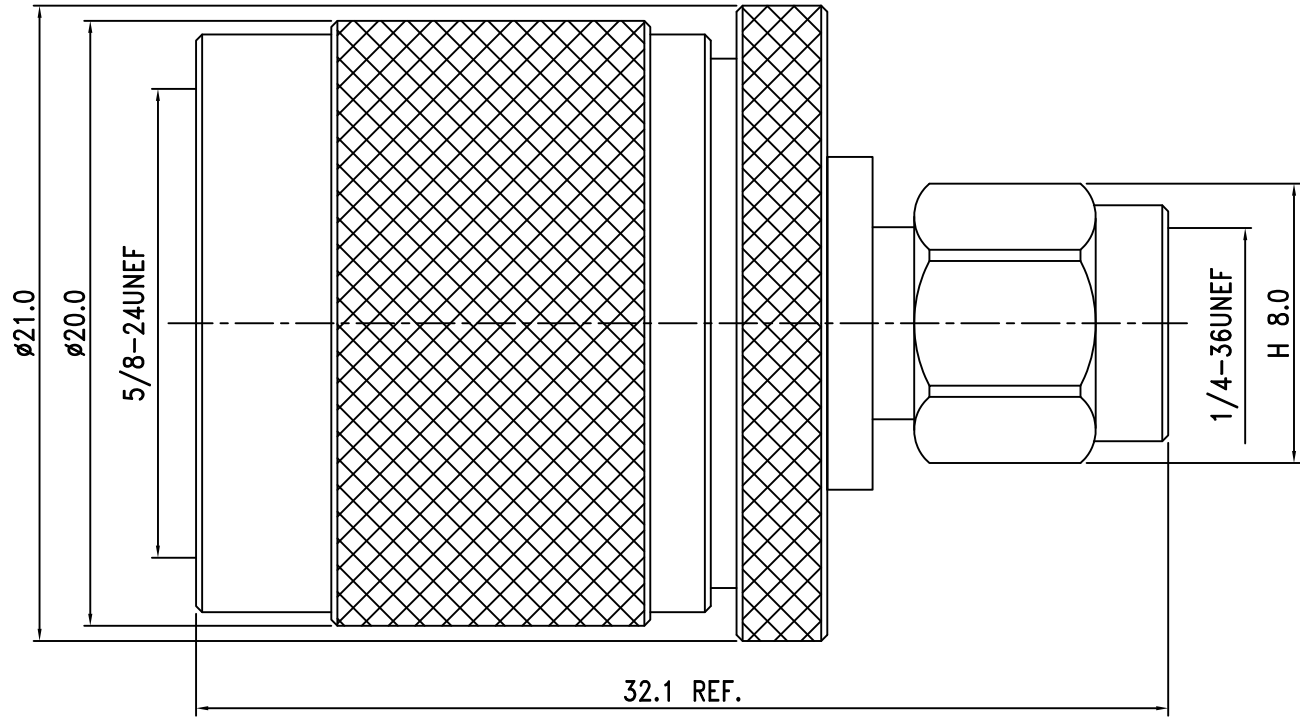

12.	Shell	Brass	1	Nickel
11.	Gasket	Silicone	1	Red
10.	Retaining Ring	Stainless Steel	1	Nickel
9.	Shell	Brass	1	Nickel
8.	Gasket	Silicone	1	Red
7.	Retaining Ring	Brass	1	None
6.	Chassis	Brass	1	Nickel
5.	Insulation	PTFE	1	White
4.	Insulation	PTFE	1	White
3.	Pin	Brass	1	Gold
2.	Body	Brass	1	Nickel
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

繪圖DRAWN	SCALE	UNITS		夏尼有限公司 SHINING PRECISION CO., LTD	
Kelly	比例 4:1	單位 mm			
審核CHECKED	公差TOLERANCE		圖名	SMA-42-S1-TGN	
Peter	.X	±0.2	TITLE		
主管APPROVAL	.XX	±0.1	版次REV.	電腦圖檔CAD FILE	日期DATE
	.XXX	±0.05	A	C:/SHINING/ADAP-PARTS/SMA-42-S1.DWG	106.12.12
Peter	ANGLE	±0.5°			

ROHS  
COMPLIANT