


|               |                               |                                                                                     |                    |
|---------------|-------------------------------|-------------------------------------------------------------------------------------|--------------------|
| Specification |                               |  |                    |
| Product Name  | SMA male to female cable assy | Part No                                                                             | ZUT26-SMAJ-SMAK-1M |

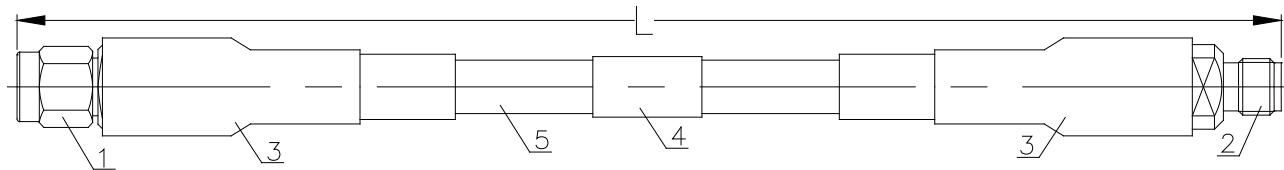

| Electric Parameter    |                                      |                 |
|-----------------------|--------------------------------------|-----------------|
| Impedance             | 50Ω                                  |                 |
| Insulation resistance | ≥5000MΩ                              |                 |
| Test Voltage          | 1000V                                |                 |
| Temperature range     | -55℃~+85℃                            |                 |
| Frequency Range       | DC ~ 26.5 GHz                        |                 |
| VSWR                  | ≤1.25:1 @ 18 GHz, ≤1.30:1 @ 26.5 GHz |                 |
| Insertion Loss        | ≤1.5dB/m*L+0.3dB                     |                 |
| Durability            | 5000 Times                           |                 |
| Diagram               |                                      |                 |
| No                    | Name                                 | Description     |
| L                     | Length                               | 1 Meter         |
| 1                     | SMA Male                             | Stainless Steel |
| 2                     | SMA Female                           | Stainless Steel |
| 3                     | Shrinkable Tube                      | Black           |
| 4                     | Label                                | -               |
| 5                     | Cable                                | ZUT26           |