


A6 Aqueduct

Omnidirectional Antenna

Technical Sheet

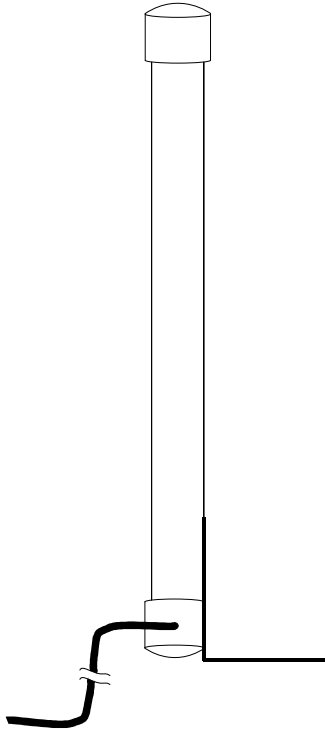

Applications

- CDMA 800
- GSM900 Systems
- GSM1800 Systems
- 3G (UMTS) 2100 System
- LTE 900/1800/2600
- Remote control

Features

- Improved performance
- All weather operation
- Light weight, small size
- Universal mounting

Specifications

A6 Aqueduct				
Freq. Range-MHz	410-450	890-960	1710-2700	
Beamwidth-°	E	75	60	50
	H	360		
Gain-dBi	5			
VSWR	≤2			
Impedance-Ω	50			
Polarization	Vertical			
Maximum Power-W	50			
Connector	N, SMA, TNC and others			
Dimensions-mm	175 x 45 x 35			
Weight-kg	0.4			
Cable	RG-58 0.5-30 m.			

Installation

