


NM-7/8L 电缆装配说明书

NM-7/8L Assembly instruction

连接器型号 /Connector types	NM-7/8L	配接电缆 /Suitable cables	7/8" cable
所需工具 /Tools required	部件1(part1) 部件2(part2) 密封圈 (seal gasket)		
①刀 片: /Scissors blade ②剥 线 器: /Cutting tool ③毛 刷: /brush ④呆扳手32: /Spanner 32mmAF			
安装注意: 安装时保证各端面清洁, 无毛刺, 金属屑. /Attention: Metal shaving or impurities on the contact area must be removed.			
1. 按照如图所示的尺寸剥线 /Prepare cable according to dimension 不要损坏电缆的中心导体和波纹管 /Do not damage corrugate and inner conductor of cable	2. 将密封圈套在电缆外导体波谷处(如图示位置) /Slide the seal gasket onto the cable, it in the outer conductor trough as shown in fig .		

3. 将部件2穿入电缆, 然后分离绝缘层, 用毛刷去除电缆端口的铜屑、毛刺等.
/ Push part2 onto the cable, then separate foam dielectric form outer connector. Then Clean the cable end with brush, keeping no copper bits, burr etc.

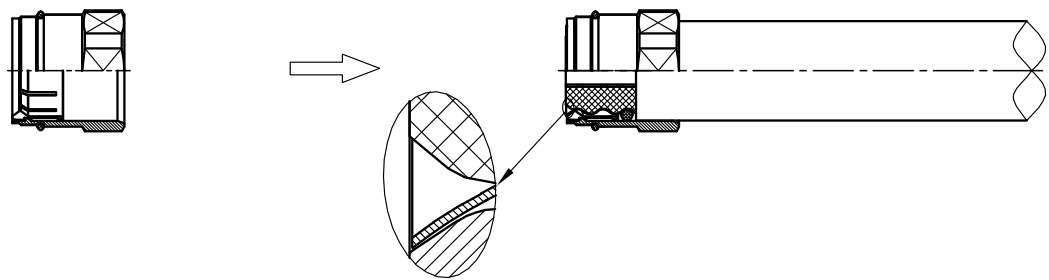

4. 扳紧部件1和件2
/Tighten part 1 and part 2

